

Comprehensive Python Cheatsheet

Download text file, Buy PDF, Fork me on GitHub or Check out FAQ.



Contents

```
ToC = {
    '1. Collections': [List, Dictionary, Set, Tuple, Range, Enumerate, Iterator, Generator],
    '2. Types': [Type, String, Regular_Exp, Format, Numbers, Combinatorics, Datetime],
    '3. Syntax': [Args, Inline, Closure, Decorator, Class, Duck_Type, Enum, Exception],
    '4. System': [Exit, Print, Input, Command_Line_Arguments, Open, Path, OS_Commands],
    '5. Data': [JSON, Pickle, CSV, SQLite, Bytes, Struct, Array, Memory_View, Deque],
    '6. Advanced': [Threading, Operator, Introspection, Metaprograming, Eval, Coroutine],
    '7. Libraries': [Progress_Bar, Plot, Table, Curses, Logging, Scraping, Web, Profile,
                    NumPy, Image, Audio, Games, Data]
}
```

Main

```
if __name__ == '__main__':    # Runs main() if file wasn't imported.
    main()
```

List

```
<list> = <list>[from_inclusive : to_exclusive : ±step_size]
```

```
<list>.append(<el>)           # Or: <list> += [<el>]
<list>.extend(<collection>)   # Or: <list> += <collection>
```

```
<list>.sort()
<list>.reverse()
<list> = sorted(<collection>)
<iter> = reversed(<list>)
```

```
sum_of_elements = sum(<collection>)
elementwise_sum = [sum(pair) for pair in zip(list_a, list_b)]
sorted_by_second = sorted(<collection>, key=lambda el: el[1])
sorted_by_both = sorted(<collection>, key=lambda el: (el[1], el[0]))
flatter_list = list(itertools.chain.from_iterable(<list>))
product_of_elems = functools.reduce(lambda out, el: out * el, <collection>)
list_of_chars = list(<str>)
```

- Module **operator** provides functions `itemgetter()` and `mul()` that offer the same functionality as **lambda** expressions above.

```

<list>.insert(<int>, <el>) # Inserts item at index and moves the rest to the right.
<el> = <list>.pop([<int>]) # Returns and removes item at index or from the end.
<int> = <list>.count(<el>) # Returns number of occurrences. Also works on strings.
<int> = <list>.index(<el>) # Returns index of the first occurrence or raises ValueError.
<list>.remove(<el>) # Removes first occurrence of the item or raises ValueError.
<list>.clear() # Removes all items. Also works on dictionary and set.

```

Dictionary

```

<view> = <dict>.keys() # Coll. of keys that reflects changes.
<view> = <dict>.values() # Coll. of values that reflects changes.
<view> = <dict>.items() # Coll. of key-value tuples that reflects chgs.

```

```

value = <dict>.get(key, default=None) # Returns default if key is missing.
value = <dict>.setdefault(key, default=None) # Returns and writes default if key is missing.
<dict> = collections.defaultdict(<type>) # Creates a dict with default value of type.
<dict> = collections.defaultdict(lambda: 1) # Creates a dict with default value 1.

```

```

<dict> = dict(<collection>) # Creates a dict from coll. of key-value pairs.
<dict> = dict(zip(keys, values)) # Creates a dict from two collections.
<dict> = dict.fromkeys(keys [, value]) # Creates a dict from collection of keys.

```

```

<dict>.update(<dict>) # Adds items. Replaces ones with matching keys.
value = <dict>.pop(key) # Removes item or raises KeyError.
{k for k, v in <dict>.items() if v == value} # Returns set of keys that point to the value.
{k: v for k, v in <dict>.items() if k in keys} # Returns a dictionary, filtered by keys.

```

Counter

```

>>> from collections import Counter
>>> colors = ['blue', 'blue', 'blue', 'red', 'red']
>>> counter = Counter(colors)
>>> counter['yellow'] += 1
Counter({'blue': 3, 'red': 2, 'yellow': 1})
>>> counter.most_common()[0]
('blue', 3)

```

Set

```

<set> = set()

```

```

<set>.add(<el>) # Or: <set> |= {<el>}
<set>.update(<collection> [, ...]) # Or: <set> |= <set>

```

```

<set> = <set>.union(<coll.>) # Or: <set> | <set>
<set> = <set>.intersection(<coll.>) # Or: <set> & <set>
<set> = <set>.difference(<coll.>) # Or: <set> - <set>
<set> = <set>.symmetric_difference(<coll.>) # Or: <set> ^ <set>
<bool> = <set>.issubset(<coll.>) # Or: <set> <= <set>
<bool> = <set>.issuperset(<coll.>) # Or: <set> >= <set>

```

```

<el> = <set>.pop() # Raises KeyError if empty.
<set>.remove(<el>) # Raises KeyError if missing.
<set>.discard(<el>) # Doesn't raise an error.

```

Frozen Set

- Is immutable and hashable.
- That means it can be used as a key in a dictionary or as an element in a set.

```

<frozenset> = frozenset(<collection>)

```

Tuple

Tuple is an immutable and hashable list.

```
<tuple> = ()  
<tuple> = (<el>,) # Or: <el>,  
<tuple> = (<el_1>, <el_2> [, ...]) # Or: <el_1>, <el_2> [, ...]
```

Named Tuple

Tuple's subclass with named elements.

```
>>> from collections import namedtuple  
>>> Point = namedtuple('Point', 'x y')  
>>> p = Point(1, y=2)  
Point(x=1, y=2)  
>>> p[0]  
1  
>>> p.x  
1  
>>> getattr(p, 'y')  
2  
>>> p._fields # Or: Point._fields  
( 'x', 'y' )
```

Range

```
<range> = range(to_exclusive)  
<range> = range(from_inclusive, to_exclusive)  
<range> = range(from_inclusive, to_exclusive, ±step_size)
```

```
from_inclusive = <range>.start  
to_exclusive = <range>.stop
```

Enumerate

```
for i, el in enumerate(<collection> [, i_start]):  
    ...
```

Iterator

```
<iter> = iter(<collection>) # `iter(<iter>)` returns unmodified iterator.  
<iter> = iter(<function>, to_exclusive) # A sequence of return values until 'to_exclusive'.  
<el> = next(<iter> [, default]) # Raises StopIteration or returns 'default' on end.  
<list> = list(<iter>) # Returns a list of iterator's remaining elements.
```

Itertools

```
from itertools import count, repeat, cycle, chain, islice
```

```
<iter> = count(start=0, step=1) # Returns updated value endlessly. Accepts floats.  
<iter> = repeat(<el> [, times]) # Returns element endlessly or 'times' times.  
<iter> = cycle(<collection>) # Repeats the sequence endlessly.
```

```
<iter> = chain(<coll_1>, <coll_2> [, ...]) # Empties collections in order.  
<iter> = chain.from_iterable(<collection>) # Empties collections inside a collection in order.
```

```
<iter> = islice(<coll>, to_exclusive) # Only returns first 'to_exclusive' elements.  
<iter> = islice(<coll>, from_inclusive, ...) # `to_exclusive, step_size`.
```

Generator

- Any function that contains a yield statement returns a generator.
- Generators and iterators are interchangeable.

```
def count(start, step):  
    while True:  
        yield start  
        start += step
```

```
>>> counter = count(10, 2)  
>>> next(counter), next(counter), next(counter)  
(10, 12, 14)
```

Type

- Everything is an object.
- Every object has a type.
- Type and class are synonymous.

```
<type> = type(<el>) # Or: <el>.__class__  
<bool> = isinstance(<el>, <type>) # Or: isinstance(type(<el>), <type>)
```

```
>>> type('a'), 'a'.__class__, str  
(<class 'str'>, <class 'str'>, <class 'str'>)
```

Some types do not have built-in names, so they must be imported:

```
from types import FunctionType, MethodType, LambdaType, GeneratorType
```

Abstract Base Classes

Each abstract base class specifies a set of virtual subclasses. These classes are then recognized by `isinstance()` and `issubclass()` as subclasses of the ABC, although they are really not. ABC can also manually decide whether or not a specific class is its virtual subclass, usually based on which methods the class has implemented. For instance, Iterable ABC looks for method `iter()` while Collection ABC looks for methods `iter()`, `contains()` and `len()`.

```
>>> from collections.abc import Sequence, Collection, Iterable  
>>> isinstance([1, 2, 3], Iterable)  
True
```

	Sequence	Collection	Iterable
list, range, str dict, set iter	✓	✓ ✓	✓ ✓ ✓

```
>>> from numbers import Integral, Rational, Real, Complex, Number  
>>> isinstance(123, Number)  
True
```

	Integral	Rational	Real	Complex	Number
int fractions.Fraction float complex decimal.Decimal	✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓ ✓ ✓

String

```
<str> = <str>.strip() # Strips all whitespace characters from both ends.
<str> = <str>.strip('<chars>') # Strips all passed characters from both ends.

<list> = <str>.split() # Splits on one or more whitespace characters.
<list> = <str>.split(sep=None, maxsplit=-1) # Splits on 'sep' str at most 'maxsplit' times.
<list> = <str>.splitlines(keepends=False) # Splits on [\n\r\f\v\x1c\x1d\x1e\x85] and '\r\n'.
<str> = <str>.join(<coll_of_strings>) # Joins elements using string as a separator.

<bool> = <sub_str> in <str> # Checks if string contains a substring.
<bool> = <str>.startswith(<sub_str>) # Pass tuple of strings for multiple options.
<bool> = <str>.endswith(<sub_str>) # Pass tuple of strings for multiple options.
<int> = <str>.find(<sub_str>) # Returns start index of the first match or -1.
<int> = <str>.index(<sub_str>) # Same but raises ValueError if missing.

<str> = <str>.replace(old, new [, count]) # Replaces 'old' with 'new' at most 'count' times.
<str> = <str>.translate(<table>) # Use `str.maketrans(<dict>)` to generate table.

<str> = chr(<int>) # Converts int to Unicode char.
<int> = ord(<str>) # Converts Unicode char to int.
```

- Also: `'rstrip()'`, `'rstrip()'`.
- Also: `'lower()'`, `'upper()'`, `'capitalize()'` and `'title()'`.

Property Methods

	[!#\$%...]	[a-zA-Z]	[¹ ₄ ¹ ₂ ³ ₄]	[² ³ ¹]	[0-9]
isprintable()	✓	✓	✓	✓	✓
isalnum()		✓	✓	✓	✓
isnumeric()			✓	✓	✓
isdigit()				✓	✓
isdecimal()					✓

- Also: `'isspace()'` checks for `'[\t\n\r\f\v...]'`.

Regex

```
import re
<str> = re.sub(<regex>, new, text, count=0) # Substitutes all occurrences with 'new'.
<list> = re.findall(<regex>, text) # Returns all occurrences as strings.
<list> = re.split(<regex>, text, maxsplit=0) # Use brackets in regex to include the matches.
<Match> = re.search(<regex>, text) # Searches for first occurrence of the pattern.
<Match> = re.match(<regex>, text) # Searches only at the beginning of the text.
<iter> = re.finditer(<regex>, text) # Returns all occurrences as match objects.
```

- `Search()` and `match()` return `None` if they can't find a match.
- Argument `'flags=re.IGNORECASE'` can be used with all functions.
- Argument `'flags=re.MULTILINE'` makes `'^'` and `'$'` match the start/end of each line.
- Argument `'flags=re.DOTALL'` makes dot also accept the `'\n'`.
- Use `r'\1'` or `'\1'` for backreference.
- Add `'?'` after an operator to make it non-greedy.

Match Object

```
<str> = <Match>.group() # Returns the whole match. Also group(0).
<str> = <Match>.group(1) # Returns part in the first bracket.
<tuple> = <Match>.groups() # Returns all bracketed parts.
<int> = <Match>.start() # Returns start index of the match.
<int> = <Match>.end() # Returns exclusive end index of the match.
```

Special Sequences

- By default, decimal characters, alphanumerics and whitespaces from all alphabets are matched unless `'flags=re.ASCII'` argument is used.
- As shown below, it restricts special sequence matches to the first 128 characters and prevents `'\s'` from accepting `'[\x1c-\x1f]'`.
- Use a capital letter for negation.

```
'\d' == '[0-9]'           # Matches decimal characters.
'\w' == '[a-zA-Z0-9_] '  # Matches alphanumerics and underscore.
'\s' == '[\t\n\r\f\v] ' # Matches whitespaces.
```

Format

```
<str> = f'{{<el_1>}, {{<el_2>}}'
<str> = '{} , {}'.format(<el_1>, <el_2>)
```

Attributes

```
>>> from collections import namedtuple
>>> Person = namedtuple('Person', 'name height')
>>> person = Person('Jean-Luc', 187)
>>> f'{{person.height}}'
'187'
>>> '{{p.height}}'.format(p=person)
'187'
```

General Options

```
{{<el>: <10}}           # '<el>'
{{<el>: ^10}}           # ' <el>'
{{<el>: >10}}           # '<el>'
{{<el>: . <10}}         # '<el>.....'
{{<el>: 0}}             # '<el>'
```

- Use `'{{<el>: {{<str/int/float>}} [...]}'` to set options dynamically.
- Adding `'!r'` before the colon converts object to string by calling its `repr()` method.

Strings

```
{{'abcde'!r: 10}}       # "'abcde'"
{{'abcde': 10.3}}       # 'abc'
{{'abcde': .3}}         # 'abc'
```

Numbers

```
{{ 123456: 10,}}       # ' 123,456'
{{ 123456: 10_}}       # ' 123_456'
{{ 123456: +10}}       # '+123456'
{{-123456: =10}}       # '- 123456'
{{ 123456: }}          # '123456'
{{-123456: }}          # '-123456'
```

Floats

```
{{1.23456: 10.3}}     # ' 1.23'
{{1.23456: 10.3f}}    # ' 1.235'
{{1.23456: 10.3e}}    # '1.235e+00'
{{1.23456: 10.3%}}    # '123.456%'
```

Comparison of presentation types:

	{<float>}	{<float>:f}	{<float>:e}	{<float>:%}
0.000056789	'5.6789e-05'	'0.000057'	'5.678900e-05'	'0.005679%'
0.00056789	'0.00056789'	'0.000568'	'5.678900e-04'	'0.056789%'
0.0056789	'0.0056789'	'0.005679'	'5.678900e-03'	'0.567890%'
0.056789	'0.056789'	'0.056789'	'5.678900e-02'	'5.678900%'
0.56789	'0.56789'	'0.567890'	'5.678900e-01'	'56.789000%'
5.6789	'5.6789'	'5.678900'	'5.678900e+00'	'567.890000%'
56.789	'56.789'	'56.789000'	'5.678900e+01'	'5678.900000%'

	{<float>:.2}	{<float>:.2f}	{<float>:.2e}	{<float>:.2%}
0.000056789	'5.7e-05'	'0.00'	'5.68e-05'	'0.01%'
0.00056789	'0.00057'	'0.00'	'5.68e-04'	'0.06%'
0.0056789	'0.0057'	'0.01'	'5.68e-03'	'0.57%'
0.056789	'0.057'	'0.06'	'5.68e-02'	'5.68%'
0.56789	'0.57'	'0.57'	'5.68e-01'	'56.79%'
5.6789	'5.7'	'5.68'	'5.68e+00'	'567.89%'
56.789	'5.7e+01'	'56.79'	'5.68e+01'	'5678.90%'

- When both rounding up and rounding down are possible, the one that returns result with even last digit is chosen. That makes '{6.5:.0f}' a '6' and '{7.5:.0f}' an '8'.

Ints

```
{90:c}          # 'Z'  
{90:b}          # '1011010'  
{90:X}          # '5A'
```

Numbers

Types

```
<int>          = int(<float/str/bool>)          # Or: math.floor(<float>)  
<float>        = float(<int/str/bool>)         # Or: <real>e±<int>  
<complex>      = complex(real=0, imag=0)       # Or: <real> ± <real>j  
<Fraction>     = fractions.Fraction(0, 1)      # Or: Fraction(numerator=0, denominator=1)  
<Decimal>      = decimal.Decimal(<str/int>)   # Or: Decimal((sign, digits, exponent))
```

- '**int(<str>)**' and '**float(<str>)**' raise **ValueError** on malformed strings.
- Decimal numbers can be represented exactly, unlike floats where '**1.1 + 2.2 != 3.3**'.
- Precision of decimal operations is set with: '**decimal.getcontext().prec = <int>**'.

Basic Functions

```
<num> = pow(<num>, <num>)          # Or: <num> ** <num>  
<num> = abs(<num>)                 # <float> = abs(<complex>)  
<num> = round(<num> [, ±ndigits])  # `round(126, -1) == 130`
```

Math

```
from math import e, pi, inf, nan, isinf, isnan  
from math import sin, cos, tan, asin, acos, atan, degrees, radians  
from math import log, log10, log2
```

Statistics

```
from statistics import mean, median, variance, stdev, pvariance, pstdev
```

Random

```
from random import random, randint, choice, shuffle, gauss, seed

<float> = random()           # A float inside [0, 1].
<int> = randint(from_inc, to_inc) # An int inside [from_inc, to_inc].
<el> = choice(<list>)       # Keeps the list intact.
```

Bin, Hex

```
<int> = ±0b<bin>           # Or: ±0x<hex>
<int> = int('±<bin>', 2)   # Or: int('±<hex>', 16)
<int> = int('±0b<bin>', 0) # Or: int('±0x<hex>', 0)
<str> = bin(<int>)         # Returns '[-]0b<bin>'.
```

Bitwise Operators

```
<int> = <int> & <int>       # And
<int> = <int> | <int>       # Or
<int> = <int> ^ <int>       # Xor (0 if both bits equal)
<int> = <int> << n_bits     # Left shift (>> for right)
<int> = ~<int>             # Not (also: -<int> - 1)
```

Combinatorics

- Every function returns an iterator.
- If you want to print the iterator, you need to pass it to the `list()` function first!

```
from itertools import product, combinations, combinations_with_replacement, permutations
```

```
>>> product([0, 1], repeat=3)
[(0, 0, 0), (0, 0, 1), (0, 1, 0), (0, 1, 1), ..., (1, 1, 1)]
```

```
>>> product('abc', 'abc')           # a b c
[('a', 'a'), ('a', 'b'), ('a', 'c'), # a x x x
 ('b', 'a'), ('b', 'b'), ('b', 'c'), # b x x x
 ('c', 'a'), ('c', 'b'), ('c', 'c')] # c x x x
```

```
>>> combinations('abc', 2)          # a b c
[('a', 'b'), ('a', 'c'),           # a . x x
 ('b', 'c')]                       # b . . x
```

```
>>> combinations_with_replacement('abc', 2) # a b c
[('a', 'a'), ('a', 'b'), ('a', 'c'),      # a x x x
 ('b', 'b'), ('b', 'c'),                 # b . x x
 ('c', 'c')]                             # c . . x
```

```
>>> permutations('abc', 2)          # a b c
[('a', 'b'), ('a', 'c'),               # a . x x
 ('b', 'a'), ('b', 'c'),               # b x . x
 ('c', 'a'), ('c', 'b')]               # c x x .
```

Datetime

- Module 'datetime' provides 'date' <D>, 'time' <T>, 'datetime' <DT> and 'timedelta' <TD> classes. All are immutable and hashable.
- Time and datetime objects can be 'aware' <a>, meaning they have defined timezone, or 'naive' <n>, meaning they don't.
- If object is naive, it is presumed to be in the system's timezone.

```
from datetime import date, time, datetime, timedelta
from dateutil.tz import UTC, tzlocal, gettz, datetime_exists, resolve_imaginary
```

Constructors

```
<D> = date(year, month, day)
<T> = time(hour=0, minute=0, second=0, microsecond=0, tzinfo=None, fold=0)
<DT> = datetime(year, month, day, hour=0, minute=0, second=0, ...)
<TD> = timedelta(days=0, seconds=0, microseconds=0, milliseconds=0,
                 minutes=0, hours=0, weeks=0)
```

- Use '<D/DT>.weekday()' to get the day of the week (Mon == 0).
- 'fold=1' means the second pass in case of time jumping back for one hour.
- '<DTa> = resolve_imaginary(<DTa>)' fixes DTs that fall into the missing hour.

Now

```
<D/DTn> = D/DT.today() # Current local date or naive datetime.
<DTn> = DT.utcnow() # Naive datetime from current UTC time.
<DTa> = DT.now(<tzinfo>) # Aware datetime from current tz time.
```

- To extract time use '<DTn>.time()', '<DTa>.time()' or '<DTa>.timetz()'.

Timezone

```
<tzinfo> = UTC # UTC timezone. London without DST.
<tzinfo> = tzlocal() # Local timezone. Also gettz().
<tzinfo> = gettz('<Continent>/<City>') # 'Continent/City_Name' timezone or None.
<DTa> = <DT>.astimezone(<tzinfo>) # Datetime, converted to the passed timezone.
<Ta/DTa> = <T/DT>.replace(tzinfo=<tzinfo>) # Unconverted object with a new timezone.
```

Encode

```
<D/T/DT> = D/T/DT.isoformat('<iso>') # Object from ISO string. Raises ValueError.
<DT> = DT.strptime(<str>, '<format>') # Datetime from str, according to format.
<D/DTn> = D/DT.fromordinal(<int>) # D/DTn from days since the Gregorian NYE 1.
<DTn> = DT.fromtimestamp(<real>) # Local time DTn from seconds since the Epoch.
<DTa> = DT.fromtimestamp(<real>, <tz.>) # Aware datetime from seconds since the Epoch.
```

- ISO strings come in following forms: 'YYYY-MM-DD', 'HH:MM:SS.ffffff[±<offset>]', or both separated by an arbitrary character. Offset is formatted as: 'HH:MM'.
- Epoch on Unix systems is: '1970-01-01 00:00 UTC', '1970-01-01 01:00 CET', ...

Decode

```
<str> = <D/T/DT>.isoformat(sep='T') # Also timespec='auto/hours/minutes/seconds'.
<str> = <D/T/DT>.strftime('<format>') # Custom string representation.
<int> = <D/DT>.toordinal() # Days since Gregorian NYE 1, ignoring time and tz.
<float> = <DTn>.timestamp() # Seconds since the Epoch, from DTn in local tz.
<float> = <DTa>.timestamp() # Seconds since the Epoch, from DTa.
```

Format

```
>>> from datetime import datetime
>>> dt = datetime.strptime('2015-05-14 23:39:00.00 +0200', '%Y-%m-%d %H:%M:%S.%f %z')
>>> dt.strftime("%A, %dth of %B '%y, %I:%M%p %Z")
"Thursday, 14th of May '15, 11:39PM UTC+02:00"
```

- When parsing, '%z' also accepts '±HH:MM'.
- For abbreviated weekday and month use '%a' and '%b'.

Arithmetics

```
<D/DT> = <D/DT> ± <TD> # Returned datetime can fall into missing hour.
<TD> = <D/DTn> - <D/DTn> # Returns the difference, ignoring time jumps.
<TD> = <DTa> - <DTa> # Ignores time jumps if they share tzinfo object.
<TD> = <DT_UTC> - <DT_UTC> # Convert DTs to UTC to get the actual delta.
```

Arguments

Inside Function Call

```
<function>(<positional_args>) # f(0, 0)
<function>(<keyword_args>) # f(x=0, y=0)
<function>(<positional_args>, <keyword_args>) # f(0, y=0)
```

Inside Function Definition

```
def f(<nondefault_args>): # def f(x, y):
def f(<default_args>): # def f(x=0, y=0):
def f(<nondefault_args>, <default_args>): # def f(x, y=0):
```

Splat Operator

Inside Function Call

Splat expands a collection into positional arguments, while splatty-splat expands a dictionary into keyword arguments.

```
args = (1, 2)
kwargs = {'x': 3, 'y': 4, 'z': 5}
func(*args, **kwargs)
```

Is the same as:

```
func(1, 2, x=3, y=4, z=5)
```

Inside Function Definition

Splat combines zero or more positional arguments into a tuple, while splatty-splat combines zero or more keyword arguments into a dictionary.

```
def add(*a):
    return sum(a)
```

```
>>> add(1, 2, 3)
6
```

Legal argument combinations:

```
def f(x, y, z):           # f(x=1, y=2, z=3) | f(1, y=2, z=3) | f(1, 2, z=3) | f(1, 2, 3)
def f(*, x, y, z):       # f(x=1, y=2, z=3)
def f(x, *, y, z):       # f(x=1, y=2, z=3) | f(1, y=2, z=3)
def f(x, y, *, z):       # f(x=1, y=2, z=3) | f(1, y=2, z=3) | f(1, 2, z=3)
```

```
def f(*args):           # f(1, 2, 3)
def f(x, *args):        # f(1, 2, 3)
def f(*args, z):        # f(1, 2, z=3)
def f(x, *args, z):     # f(1, 2, z=3)
```

```
def f(**kwargs):        # f(x=1, y=2, z=3)
def f(x, **kwargs):     # f(x=1, y=2, z=3) | f(1, y=2, z=3)
def f(*, x, **kwargs):  # f(x=1, y=2, z=3)
```

```
def f(*args, **kwargs): # f(x=1, y=2, z=3) | f(1, y=2, z=3) | f(1, 2, z=3) | f(1, 2, 3)
def f(x, *args, **kwargs): # f(x=1, y=2, z=3) | f(1, y=2, z=3) | f(1, 2, z=3) | f(1, 2, 3)
def f(*args, y, **kwargs): # f(x=1, y=2, z=3) | f(1, y=2, z=3)
def f(x, *args, z, **kwargs): # f(x=1, y=2, z=3) | f(1, y=2, z=3) | f(1, 2, z=3)
```

Other Uses

```
<list> = [*<collection> [, ...]]
<set> = {*<collection> [, ...]}
<tup.> = (*<collection>, [...])
<dict> = {**<dict> [, ...]}
```

```
head, *body, tail = <collection>
```

Inline

Lambda

```
<func> = lambda: <return_value>
<func> = lambda <arg_1>, <arg_2>: <return_value>
```

Comprehensions

```
<list> = [i+1 for i in range(10)]           # [1, 2, ..., 10]
<set> = {i for i in range(10) if i > 5}    # {6, 7, 8, 9}
<iter> = (i+5 for i in range(10))         # (5, 6, ..., 14)
<dict> = {i: i*2 for i in range(10)}       # {0: 0, 1: 2, ..., 9: 18}
```

```
>>> [l+r for l in 'abc' for r in 'abc']
['aa', 'ab', 'ac', ..., 'cc']
```

Map, Filter, Reduce

```
<iter> = map(lambda x: x + 1, range(10))   # (1, 2, ..., 10)
<iter> = filter(lambda x: x > 5, range(10)) # (6, 7, 8, 9)
<obj> = reduce(lambda out, x: out + x, range(10)) # 45
```

- Reduce must be imported from functools module.

Any, All

```
<bool> = any(<collection>)                # False if empty.
<bool> = all(el[1] for el in <collection>) # True if empty.
```

Conditional Expression

```
<obj> = <exp_if_true> if <condition> else <exp_if_false>
```

```
>>> [a if a else 'zero' for a in (0, 1, 2, 3)]  
['zero', 1, 2, 3]
```

Namedtuple, Enum, Dataclass

```
from collections import namedtuple  
Point = namedtuple('Point', 'x y')  
point = Point(0, 0)
```

```
from enum import Enum  
Direction = Enum('Direction', 'n e s w')  
direction = Direction.n
```

```
from dataclasses import make_dataclass  
Creature = make_dataclass('Creature', ['loc', 'dir'])  
creature = Creature(Point(0, 0), Direction.n)
```

Closure

We have a closure in Python when:

- A nested function references a value of its enclosing function and then
- the enclosing function returns the nested function.

```
def get_multiplier(a):  
    def out(b):  
        return a * b  
    return out
```

```
>>> multiply_by_3 = get_multiplier(3)  
>>> multiply_by_3(10)  
30
```

- If multiple nested functions within enclosing function reference the same value, that value gets shared.
- To dynamically access function's first free variable use '`<function>.__closure__[0].cell_contents`'.

Partial

```
from functools import partial  
<function> = partial(<function> [, <arg_1>, <arg_2>, ...])
```

```
>>> import operator as op  
>>> multiply_by_3 = partial(op.mul, 3)  
>>> multiply_by_3(10)  
30
```

- Partial is also useful in cases when function needs to be passed as an argument, because it enables us to set its arguments beforehand.
- A few examples being: '`defaultdict(<function>)`', '`iter(<function>, to_exclusive)`' and dataclass's '`field(default_factory=<function>)`'.

Non-Local

If variable is being assigned to anywhere in the scope, it is regarded as a local variable, unless it is declared as a 'global' or a 'nonlocal'.

```
def get_counter():  
    i = 0  
    def out():  
        nonlocal i  
        i += 1  
        return i  
    return out
```

```
>>> counter = get_counter()  
>>> counter(), counter(), counter()  
(1, 2, 3)
```

Decorator

A decorator takes a function, adds some functionality and returns it.

```
@decorator_name
def function_that_gets_passed_to_decorator():
    ...
```

Debugger Example

Decorator that prints function's name every time it gets called.

```
from functools import wraps

def debug(func):
    @wraps(func)
    def out(*args, **kwargs):
        print(func.__name__)
        return func(*args, **kwargs)
    return out

@debug
def add(x, y):
    return x + y
```

- Wraps is a helper decorator that copies the metadata of the passed function (func) to the function it is wrapping (out).
- Without it 'add.__name__' would return 'out'.

LRU Cache

Decorator that caches function's return values. All function's arguments must be hashable.

```
from functools import lru_cache

@lru_cache(maxsize=None)
def fib(n):
    return n if n < 2 else fib(n-2) + fib(n-1)
```

- CPython interpreter limits recursion depth to 1000 by default. To increase it use 'sys.setrecursionlimit(<depth>)'.

Parametrized Decorator

A decorator that accepts arguments and returns a normal decorator that accepts a function.

```
from functools import wraps

def debug(print_result=False):
    def decorator(func):
        @wraps(func)
        def out(*args, **kwargs):
            result = func(*args, **kwargs)
            print(func.__name__, result if print_result else '')
            return result
        return out
    return decorator

@debug(print_result=True)
def add(x, y):
    return x + y
```

Class

```
class <name>:
    def __init__(self, a):
        self.a = a
    def __repr__(self):
        class_name = self.__class__.__name__
        return f'{class_name}({self.a!r})'
    def __str__(self):
        return str(self.a)

    @classmethod
    def get_class_name(cls):
        return cls.__name__
```

- Return value of repr() should be unambiguous and of str() readable.
- If only repr() is defined, it will also be used for str().

Str() use cases:

```
print(<el>)
print(f'{<el>}!')
raise Exception(<el>)
loguru.logger.debug(<el>)
csv.writer(<file>).writerow([<el>])
```

Repr() use cases:

```
print([<el>])
print(f'{<el>!r}')
>>> <el>
loguru.logger.exception()
Z = dataclasses.make_dataclass('Z', ['a']); print(Z(<el>))
```

Constructor Overloading

```
class <name>:
    def __init__(self, a=None):
        self.a = a
```

Inheritance

```
class Person:
    def __init__(self, name, age):
        self.name = name
        self.age = age

class Employee(Person):
    def __init__(self, name, age, staff_num):
        super().__init__(name, age)
        self.staff_num = staff_num
```

Multiple Inheritance

```
class A: pass
class B: pass
class C(A, B): pass
```

MRO determines the order in which parent classes are traversed when searching for a method:

```
>>> C.mro()
[<class 'C'>, <class 'A'>, <class 'B'>, <class 'object'>]
```

Property

Pythonic way of implementing getters and setters.

```
class MyClass:
    @property
    def a(self):
        return self._a

    @a.setter
    def a(self, value):
        self._a = value
```

```
>>> el = MyClass()
>>> el.a = 123
>>> el.a
123
```

Dataclass

Decorator that automatically generates `init()`, `repr()` and `eq()` special methods.

```
from dataclasses import dataclass, field

@dataclass(order=False, frozen=False)
class <class_name>:
    <attr_name_1>: <type>
    <attr_name_2>: <type> = <default_value>
    <attr_name_3>: list/dict/set = field(default_factory=list/dict/set)
```

- Objects can be made sortable with `'order=True'` and immutable with `'frozen=True'`.
- For object to be hashable, all attributes must be hashable and frozen must be True.
- Function `field()` is needed because `'<attr_name>: list = []'` would make a list that is shared among all instances.
- `Default_factory` can be any callable.

Inline:

```
from dataclasses import make_dataclass
<class> = make_dataclass('<class_name>', <coll_of_attribute_names>)
<class> = make_dataclass('<class_name>', <coll_of_tuples>)
<tuple> = (<attr_name>', <type> [, <default_value>])
```

Slots

Mechanism that restricts objects to attributes listed in 'slots' and significantly reduces their memory footprint.

```
class MyClassWithSlots:
    __slots__ = ['a']
    def __init__(self):
        self.a = 1
```

Copy

```
from copy import copy, deepcopy

<object> = copy(<object>)
<object> = deepcopy(<object>)
```

Duck Types

A duck type is an implicit type that prescribes a set of special methods. Any object that has those methods defined is considered a member of that duck type.

Comparable

- If `eq()` method is not overridden, it returns `'id(self) == id(other)'`, which is the same as `'self is other'`.
- That means all objects compare not equal by default.
- Only the left side object has `eq()` method called, unless it returns `NotImplemented`, in which case the right object is consulted.

```
class MyComparable:
    def __init__(self, a):
        self.a = a
    def __eq__(self, other):
        if isinstance(other, type(self)):
            return self.a == other.a
        return NotImplemented
```

Hashable

- Hashable object needs both `hash()` and `eq()` methods and its hash value should never change.
- Hashable objects that compare equal must have the same hash value, meaning default `hash()` that returns `'id(self)'` will not do.
- That is why Python automatically makes classes unhashable if you only implement `eq()`.

```
class MyHashable:
    def __init__(self, a):
        self._a = a
    @property
    def a(self):
        return self._a
    def __eq__(self, other):
        if isinstance(other, type(self)):
            return self.a == other.a
        return NotImplemented
    def __hash__(self):
        return hash(self.a)
```

Sortable

- With `total_ordering` decorator, you only need to provide `eq()` and one of `lt()`, `gt()`, `le()` or `ge()` special methods.

```
from functools import total_ordering

@total_ordering
class MySortable:
    def __init__(self, a):
        self.a = a
    def __eq__(self, other):
        if isinstance(other, type(self)):
            return self.a == other.a
        return NotImplemented
    def __lt__(self, other):
        if isinstance(other, type(self)):
            return self.a < other.a
        return NotImplemented
```

Iterator

- Any object that has methods `next()` and `iter()` is an iterator.
- `Next()` should return next item or raise `StopIteration`.
- `Iter()` should return 'self'.

```
class Counter:
    def __init__(self):
        self.i = 0
    def __next__(self):
        self.i += 1
        return self.i
    def __iter__(self):
        return self
```

```
>>> counter = Counter()
>>> next(counter), next(counter), next(counter)
(1, 2, 3)
```

Python has many different iterator objects:

- Sequence iterators returned by the `iter()` function, such as `list_iterator` and `set_iterator`.
- Objects returned by the `itertools` module, such as `count`, `repeat` and `cycle`.
- Generators returned by the `generator functions` and `generator expressions`.
- File objects returned by the `open()` function, etc.

Callable

- All functions and classes have a `call()` method, hence are callable.
- When this cheatsheet uses '`<function>`' as an argument, it actually means '`<callable>`'.

```
class Counter:
    def __init__(self):
        self.i = 0
    def __call__(self):
        self.i += 1
        return self.i
```

```
>>> counter = Counter()
>>> counter(), counter(), counter()
(1, 2, 3)
```

Context Manager

- `Enter()` should lock the resources and optionally return an object.
- `Exit()` should release the resources.
- Any exception that happens inside the `with` block is passed to the `exit()` method.
- If it wishes to suppress the exception it must return a true value.

```
class MyOpen:
    def __init__(self, filename):
        self.filename = filename
    def __enter__(self):
        self.file = open(self.filename)
        return self.file
    def __exit__(self, exc_type, exception, traceback):
        self.file.close()
```

```
>>> with open('test.txt', 'w') as file:
...     file.write('Hello World!')
>>> with MyOpen('test.txt') as file:
...     print(file.read())
Hello World!
```

Iterable Duck Types

Iterable

- Only required method is `iter()`. It should return an iterator of object's items.
- `Contains()` automatically works on any object that has `iter()` defined.

```
class MyIterable:
    def __init__(self, a):
        self.a = a
    def __iter__(self):
        return iter(self.a)
    def __contains__(self, el):
        return el in self.a
```

```
>>> obj = MyIterable([1, 2, 3])
>>> [el for el in obj]
[1, 2, 3]
>>> 1 in obj
True
```

Collection

- Only required methods are `iter()` and `len()`.
- This cheatsheet actually means '`<iterable>`' when it uses '`<collection>`'.
- I chose not to use the name 'iterable' because it sounds scarier and more vague than 'collection'.

```
class MyCollection:
    def __init__(self, a):
        self.a = a
    def __iter__(self):
        return iter(self.a)
    def __contains__(self, el):
        return el in self.a
    def __len__(self):
        return len(self.a)
```

Sequence

- Only required methods are `len()` and `getitem()`.
- `Getitem()` should return an item at index or raise `IndexError`.
- `Iter()` and `contains()` automatically work on any object that has `getitem()` defined.
- `Reversed()` automatically works on any object that has `len()` and `getitem()` defined.

```
class MySequence:
    def __init__(self, a):
        self.a = a
    def __iter__(self):
        return iter(self.a)
    def __contains__(self, el):
        return el in self.a
    def __len__(self):
        return len(self.a)
    def __getitem__(self, i):
        return self.a[i]
    def __reversed__(self):
        return reversed(self.a)
```

ABC Sequence

- It's a richer interface than the basic sequence.
- Extending it generates `iter()`, `contains()`, `reversed()`, `index()` and `count()`.
- Unlike `'abc.Iterable'` and `'abc.Collection'`, it is not a duck type. That is why `'issubclass(MySequence, abc.Sequence)'` would return `False` even if `MySequence` had all the methods defined.

```
from collections import abc

class MyAbcSequence(abc.Sequence):
    def __init__(self, a):
        self.a = a
    def __len__(self):
        return len(self.a)
    def __getitem__(self, i):
        return self.a[i]
```

Table of required and automatically available special methods:

	Iterable	Collection	Sequence	abc.Sequence
<code>iter()</code>	!	!	✓	✓
<code>contains()</code>	✓	✓	✓	✓
<code>len()</code>		!	!	!
<code>getitem()</code>			!	!
<code>reversed()</code>			✓	✓
<code>index()</code>				✓
<code>count()</code>				✓

- Other ABCs that generate missing methods are: `MutableSequence`, `Set`, `MutableSet`, `Mapping` and `MutableMapping`.
- Names of their required methods are stored in `'<abc>.__abstractmethods__'`.

Enum

```
from enum import Enum, auto
```

```
class <enum_name>(Enum):
    <member_name_1> = <value_1>
    <member_name_2> = <value_2_a>, <value_2_b>
    <member_name_3> = auto()
```

- If there are no numeric values before `auto()`, it returns 1.
- Otherwise it returns an increment of the last numeric value.

```
<member> = <enum>.<member_name> # Returns a member.
<member> = <enum>['<member_name>'] # Returns a member or raises KeyError.
<member> = <enum>(<value>) # Returns a member or raises ValueError.
<str> = <member>.name # Returns member's name.
<obj> = <member>.value # Returns member's value.
```

```
list_of_members = list(<enum>)
member_names = [a.name for a in <enum>]
member_values = [a.value for a in <enum>]
random_member = random.choice(list(<enum>))
```

```
def get_next_member(member):
    members = list(member.__class__)
    index = (members.index(member) + 1) % len(members)
    return members[index]
```


Inline

```
Cutlery = Enum('Cutlery', 'fork knife spoon')
Cutlery = Enum('Cutlery', ['fork', 'knife', 'spoon'])
Cutlery = Enum('Cutlery', {'fork': 1, 'knife': 2, 'spoon': 3})
```

User-defined functions cannot be values, so they must be wrapped:

```
from functools import partial
LogicOp = Enum('LogicOp', {'AND': partial(lambda l, r: l and r),
                           'OR' : partial(lambda l, r: l or r)})
```

- Another solution in this particular case is to use functions `and_()` and `or_()` from the module `operator`.

Exceptions

Basic Example

```
try:
    <code>
except <exception>:
    <code>
```

Complex Example

```
try:
    <code_1>
except <exception_a>:
    <code_2_a>
except <exception_b>:
    <code_2_b>
else:
    <code_2_c>
finally:
    <code_3>
```

- Code inside the `'else'` block will only be executed if `'try'` block had no exceptions.
- Code inside the `'finally'` block will always be executed.

Catching Exceptions

```
except <exception>:
except <exception> as <name>:
except (<exception>, [...]):
except (<exception>, [...]) as <name>:
```

- Also catches subclasses of the exception.
- Use `'traceback.print_exc()'` to print the error message to `stderr`.
- Use `'print(<name>)'` to print just the cause of the exception (its arguments).

Raising Exceptions

```
raise <exception>
raise <exception>()
raise <exception>(<el> [, ...])
```

Re-raising caught exception:

```
except <exception> as <name>:
    ...
    raise
```

Exception Object

```
arguments = <name>.args
exc_type = <name>.__class__
filename = <name>.__traceback__.tb_frame.f_code.co_filename
func_name = <name>.__traceback__.tb_frame.f_code.co_name
line = linecache.getline(filename, <name>.__traceback__.tb_lineno)
error_msg = ''.join(traceback.format_exception(exc_type, <name>, <name>.__traceback__))
```

Built-in Exceptions

```
BaseException
├── SystemExit # Raised by the sys.exit() function.
├── KeyboardInterrupt # Raised when the user hits the interrupt key (ctrl-c).
├── Exception # User-defined exceptions should be derived from this class.
│   ├── ArithmeticError # Base class for arithmetic errors.
│   │   └── ZeroDivisionError # Raised when dividing by zero.
│   ├── AttributeError # Raised when an attribute is missing.
│   ├── EOFError # Raised by input() when it hits end-of-file condition.
│   ├── LookupError # Raised when a look-up on a collection fails.
│   │   ├── IndexError # Raised when a sequence index is out of range.
│   │   └── KeyError # Raised when a dictionary key or set element is not found.
│   ├── NameError # Raised when a variable name is not found.
│   ├── OSError # Errors such as "file not found" or "disk full" (see Open).
│   │   └── FileNotFoundError # When a file or directory is requested but doesn't exist.
│   ├── RuntimeError # Raised by errors that don't fall in other categories.
│   │   └── RecursionError # Raised when the maximum recursion depth is exceeded.
│   ├── StopIteration # Raised by next() when run on an empty iterator.
│   ├── TypeError # Raised when an argument is of wrong type.
│   └── ValueError # When an argument is of right type but inappropriate value.
│       └── UnicodeError # Raised when encoding/decoding strings to/from bytes fails.
```

Collections and their exceptions:

	List	Set	Dict
getitem()	IndexError		KeyError
pop()	IndexError	KeyError	KeyError
remove()	ValueError	KeyError	
index()	ValueError		

Useful built-in exceptions:

```
raise TypeError('Argument is of wrong type!')
raise ValueError('Argument is of right type but inappropriate value!')
raise RuntimeError('None of above!')
```

User-defined Exceptions

```
class MyError(Exception):
    pass

class MyInputError(MyError):
    pass
```

Exit

Exits the interpreter by raising SystemExit exception.

```
import sys
sys.exit() # Exits with exit code 0 (success).
sys.exit(<el>) # Prints to stderr and exits with 1.
sys.exit(<int>) # Exits with passed exit code.
```

Print

```
print(<el_1>, ..., sep=' ', end='\n', file=sys.stdout, flush=False)
```

- Use `'file=sys.stderr'` for messages about errors.
- Use `'flush=True'` to forcibly flush the stream.

Pretty Print

```
from pprint import pprint
pprint(<collection>, width=80, depth=None, compact=False, sort_dicts=True)
```

- Levels deeper than 'depth' get replaced by '...':

Input

Reads a line from user input or pipe if present.

```
<str> = input(prompt=None)
```

- Trailing newline gets stripped.
- Prompt string is printed to the standard output before reading input.
- Raises EOFError when user hits EOF (ctrl-d/z) or input stream gets exhausted.

Command Line Arguments

```
import sys
scripts_path = sys.argv[0]
arguments = sys.argv[1:]
```

Argument Parser

```
from argparse import ArgumentParser, FileType
p = ArgumentParser(description=<str>)
p.add_argument('-<short_name>', '--<name>', action='store_true') # Flag
p.add_argument('-<short_name>', '--<name>', type=<type>) # Option
p.add_argument('<name>', type=<type>, nargs=1) # First argument
p.add_argument('<name>', type=<type>, nargs='+') # Remaining arguments
p.add_argument('<name>', type=<type>, nargs='*') # Optional arguments
args = p.parse_args() # Exits on error.
value = args.<name>
```

- Use `'help=<str>'` to set argument description.
- Use `'default=<el>'` to set the default value.
- Use `'type=FileType(<mode>)'` for files.

Open

Opens the file and returns a corresponding file object.

```
<file> = open(<path>, mode='r', encoding=None, newline=None)
```

- `'encoding=None'` means that the default encoding is used, which is platform dependent. Best practice is to use `'encoding="utf-8"'` whenever possible.
- `'newline=None'` means all different end of line combinations are converted to `\n` on read, while on write all `\n` characters are converted to system's default line separator.

- `'newline=""` means no conversions take place, but input is still broken into chunks by `readline()` and `readlines()` on either `\n`, `\r` or `\r\n`.

Modes

- `'r'` - Read (default).
- `'w'` - Write (truncate).
- `'x'` - Write or fail if the file already exists.
- `'a'` - Append.
- `'w+'` - Read and write (truncate).
- `'r+'` - Read and write from the start.
- `'a+'` - Read and write from the end.
- `'t'` - Text mode (default).
- `'b'` - Binary mode.

Exceptions

- `'FileNotFoundError'` can be raised when reading with `'r'` or `'r+'`.
- `'FileExistsError'` can be raised when writing with `'x'`.
- `'IsADirectoryError'` and `'PermissionError'` can be raised by any.
- `'OSError'` is the parent class of all listed exceptions.

File Object

```

<file>.seek(0)           # Moves to the start of the file.
<file>.seek(offset)     # Moves 'offset' chars/bytes from the start.
<file>.seek(0, 2)       # Moves to the end of the file.
<bin_file>.seek(±offset, <anchor>) # Anchor: 0 start, 1 current position, 2 end.

<str/bytes> = <file>.read(size=-1) # Reads 'size' chars/bytes or until EOF.
<str/bytes> = <file>.readline()    # Returns a line or empty string/bytes on EOF.
<list>      = <file>.readlines()   # Returns a list of remaining lines.
<str/bytes> = next(<file>)         # Returns a line using buffer. Do not mix.

<file>.write(<str/bytes>)          # Writes a string or bytes object.
<file>.writelines(<collection>)    # Writes a coll. of strings or bytes objects.
<file>.flush()                    # Flushes write buffer.

```

- Methods do not add or strip trailing newlines, even `writelines()`.

Read Text from File

```

def read_file(filename):
    with open(filename, encoding='utf-8') as file:
        return file.readlines()

```

Write Text to File

```

def write_to_file(filename, text):
    with open(filename, 'w', encoding='utf-8') as file:
        file.write(text)

```

Paths

```

from os import getcwd, path, listdir
from glob import glob

```

```

<str> = getcwd()           # Returns the current working directory.
<str> = path.join(<path>, ...) # Joins two or more pathname components.
<str> = path.abspath(<path>)  # Returns absolute path.

```

```

<str> = path.basename(<path>) # Returns final component of the path.
<str> = path.dirname(<path>) # Returns path without the final component.
<tup.> = path.splittext(<path>) # Splits on last period of the final component.

<list> = listdir(path='.') # Returns filenames located at path.
<list> = glob('<pattern>') # Returns paths matching the wildcard pattern.

<bool> = path.exists(<path>) # Or: <Path>.exists()
<bool> = path.isfile(<path>) # Or: <DirEntry/Path>.is_file()
<bool> = path.isdir(<path>) # Or: <DirEntry/Path>.is_dir()

```

DirEntry

Using `scandir()` instead of `listdir()` can significantly increase the performance of code that also needs file type information.

```
from os import scandir
```

```

<iter> = scandir(path='.') # Returns DirEntry objects located at path.
<str> = <DirEntry>.path # Returns whole path as a string.
<str> = <DirEntry>.name # Returns final component as a string.
<file> = open(<DirEntry>) # Opens the file and returns file object.

```

Path Object

```
from pathlib import Path
```

```

<Path> = Path(<path> [, ...]) # Accepts strings, Paths and DirEntry objects.
<Path> = <path> / <path> [/ ...] # One of the paths must be a Path object.

```

```

<Path> = Path() # Returns relative cwd. Also Path('.').
<Path> = Path.cwd() # Returns absolute cwd. Also Path().resolve().
<Path> = Path.home() # Returns user's home directory.
<Path> = Path(__file__).resolve() # Returns script's path if cwd wasn't changed.

```

```

<Path> = <Path>.parent # Returns Path without final component.
<str> = <Path>.name # Returns final component as a string.
<str> = <Path>.stem # Returns final component without extension.
<str> = <Path>.suffix # Returns final component's extension.
<tup.> = <Path>.parts # Returns all components as strings.

```

```

<iter> = <Path>.iterdir() # Returns dir contents as Path objects.
<iter> = <Path>.glob('<pattern>') # Returns Paths matching the wildcard pattern.

```

```

<str> = str(<Path>) # Returns path as a string.
<file> = open(<Path>) # Opens the file and returns file object.

```

OS Commands

Files and Directories

- Paths can be either strings, Paths or DirEntry objects.
- Functions report OS related errors by raising either `OSError` or one of its subclasses.

```
import os, shutil
```

```

os.chdir(<path>) # Changes the current working directory.
os.mkdir(<path>, mode=0o777) # Creates a directory. Mode is in octal.
os.makedirs(<path>, mode=0o777) # Creates all directories in the path.

```

```

shutil.copy(from, to) # Copies the file. 'to' can exist or be a dir.
shutil.copytree(from, to) # Copies the directory. 'to' must not exist.

```

```

os.rename(from, to)           # Renames/moves the file or directory.
os.replace(from, to)         # Same, but overwrites 'to' if it exists.

os.remove(<path>)            # Deletes the file.
os.rmdir(<path>)             # Deletes the empty directory.
shutil.rmtree(<path>)        # Deletes the directory.

```

Shell Commands

```

import os
<str> = os.popen('<shell_command>').read()

```

Sends '1 + 1' to the basic calculator and captures its output:

```

>>> from subprocess import run
>>> run('bc', input='1 + 1\n', capture_output=True, encoding='utf-8')
CompletedProcess(args='bc', returncode=0, stdout='2\n', stderr='')

```

Sends test.in to the basic calculator running in standard mode and saves its output to test.out:

```

>>> from shlex import split
>>> os.popen('echo 1 + 1 > test.in')
>>> run(split('bc -s'), stdin=open('test.in'), stdout=open('test.out', 'w'))
CompletedProcess(args=['bc', '-s'], returncode=0)
>>> open('test.out').read()
'2\n'

```

JSON

Text file format for storing collections of strings and numbers.

```

import json
<str> = json.dumps(<object>, ensure_ascii=True, indent=None)
<object> = json.loads(<str>)

```

Read Object from JSON File

```

def read_json_file(filename):
    with open(filename, encoding='utf-8') as file:
        return json.load(file)

```

Write Object to JSON File

```

def write_to_json_file(filename, an_object):
    with open(filename, 'w', encoding='utf-8') as file:
        json.dump(an_object, file, ensure_ascii=False, indent=2)

```

Pickle

Binary file format for storing objects.

```

import pickle
<bytes> = pickle.dumps(<object>)
<object> = pickle.loads(<bytes>)

```

Read Object from File

```
def read_pickle_file(filename):  
    with open(filename, 'rb') as file:  
        return pickle.load(file)
```

Write Object to File

```
def write_to_pickle_file(filename, an_object):  
    with open(filename, 'wb') as file:  
        pickle.dump(an_object, file)
```

CSV

Text file format for storing spreadsheets.

```
import csv
```

Read

```
<reader> = csv.reader(<file>)           # Also: `dialect='excel', delimiter=','.  
<list>    = next(<reader>)              # Returns next row as a list of strings.  
<list>    = list(<reader>)              # Returns list of remaining rows.
```

- File must be opened with a **'newline=""** argument, or newlines embedded inside quoted fields will not be interpreted correctly!

Write

```
<writer> = csv.writer(<file>)           # Also: `dialect='excel', delimiter=','.  
<writer>.writerow(<collection>)         # Encodes objects using `str(<el>`.  
<writer>.writerows(<coll_of_coll>)     # Appends multiple rows.
```

- File must be opened with a **'newline=""** argument, or `\r` will be added in front of every `\n` on platforms that use `\r\n` line endings!

Parameters

- **'dialect'** - Master parameter that sets the default values.
- **'delimiter'** - A one-character string used to separate fields.
- **'quotechar'** - Character for quoting fields that contain special characters.
- **'doublequote'** - Whether quotechars inside fields get doubled or escaped.
- **'skipinitialspace'** - Whether whitespace after delimiter gets stripped.
- **'lineterminator'** - Specifies how writer terminates rows.
- **'quoting'** - Controls the amount of quoting: 0 - as necessary, 1 - all.
- **'escapechar'** - Character for escaping 'quotechar' if 'doublequote' is False.

Dialects

	excel	excel-tab	unix
delimiter	','	'\t'	','
quotechar	'\"'	'\"'	'\"'
doublequote	True	True	True
skipinitialspace	False	False	False
lineterminator	'\r\n'	'\r\n'	'\n'
quoting	0	0	1
escapechar	None	None	None

Read Rows from CSV File

```
def read_csv_file(filename):  
    with open(filename, encoding='utf-8', newline='') as file:  
        return list(csv.reader(file))
```

Write Rows to CSV File

```
def write_to_csv_file(filename, rows):  
    with open(filename, 'w', encoding='utf-8', newline='') as file:  
        writer = csv.writer(file)  
        writer.writerows(rows)
```

SQLite

Server-less database engine that stores each database into a separate file.

Connect

Opens a connection to the database file. Creates a new file if path doesn't exist.

```
import sqlite3  
<conn> = sqlite3.connect(<path>) # Also ':memory:'.  
<conn>.close() # Closes the connection.
```

Read

Returned values can be of type str, int, float, bytes or None.

```
<cursor> = <conn>.execute('<query>') # Can raise a subclass of sqlite3.Error.  
<tuple> = <cursor>.fetchone() # Returns next row. Also next(<cursor>).  
<list> = <cursor>.fetchall() # Returns remaining rows. Also list(<cursor>).
```

Write

```
<conn>.execute('<query>') # Can raise a subclass of sqlite3.Error.  
<conn>.commit() # Saves all changes since the last commit.  
<conn>.rollback() # Discards all changes since the last commit.
```

Or:

```
with <conn>:  
    <conn>.execute('<query>') # Exits the block with commit() or rollback(),  
                             # depending on whether an exception occurred.
```

Placeholders

- Passed values can be of type str, int, float, bytes, None, bool, datetime.date or datetime.datetime.
- Booleans will be stored and returned as ints and dates as **ISO formatted strings**.

```
<conn>.execute('<query>', <list/tuple>) # Replaces '?'s in query with values.  
<conn>.execute('<query>', <dict/namedtuple>) # Replaces ':<key>'s with values.  
<conn>.executemany('<query>', <coll_of_above>) # Runs execute() multiple times.
```


Example

In this example values are not actually saved because `'conn.commit()'` is omitted!

```
>>> conn = sqlite3.connect('test.db')
>>> conn.execute('CREATE TABLE person (person_id INTEGER PRIMARY KEY, name, height)')
>>> conn.execute('INSERT INTO person VALUES (NULL, ?, ?)', ('Jean-Luc', 187)).lastrowid
1
>>> conn.execute('SELECT * FROM person').fetchall()
[(1, 'Jean-Luc', 187)]
```

MySQL

Has a very similar interface, with differences listed below.

```
# $ pip3 install mysql-connector
from mysql import connector
<conn> = connector.connect(host=<str>, ...) # `user=<str>, password=<str>, database=<str>`.
<cursor> = <conn>.cursor() # Only cursor has execute method.
<cursor>.execute('<query>') # Can raise a subclass of connector.Error.
<cursor>.execute('<query>', <list/tuple>) # Replaces '%s's in query with values.
<cursor>.execute('<query>', <dict/namedtuple>) # Replaces '%(<key>)'s with values.
```

Bytes

Bytes object is an immutable sequence of single bytes. Mutable version is called bytearray.

```
<bytes> = b'<str>' # Only accepts ASCII characters and \x00-\xff.
<int> = <bytes>[<index>] # Returns int in range from 0 to 255.
<bytes> = <bytes>[<slice>] # Returns bytes even if it has only one element.
<bytes> = <bytes>.join(<coll_of_bytes>) # Joins elements using bytes as a separator.
```

Encode

```
<bytes> = bytes(<coll_of_ints>) # Ints must be in range from 0 to 255.
<bytes> = bytes(<str>, 'utf-8') # Or: <str>.encode('utf-8')
<bytes> = <int>.to_bytes(n_bytes, ...) # `byteorder='big/little', signed=False`.
<bytes> = bytes.fromhex('<hex>') # Hex pairs can be separated by spaces.
```

Decode

```
<list> = list(<bytes>) # Returns ints in range from 0 to 255.
<str> = str(<bytes>, 'utf-8') # Or: <bytes>.decode('utf-8')
<int> = int.from_bytes(<bytes>, ...) # `byteorder='big/little', signed=False`.
'<hex>' = <bytes>.hex() # Returns a string of hexadecimal pairs.
```

Read Bytes from File

```
def read_bytes(filename):
    with open(filename, 'rb') as file:
        return file.read()
```

Write Bytes to File

```
def write_bytes(filename, bytes_obj):
    with open(filename, 'wb') as file:
        file.write(bytes_obj)
```

Struct

- Module that performs conversions between a sequence of numbers and a bytes object.
- System's type sizes and byte order are used by default.

```
from struct import pack, unpack, iter_unpack
```

```
<bytes> = pack('<format>', <num_1> [, <num_2>, ...])  
<tuple> = unpack('<format>', <bytes>)  
<tuples> = iter_unpack('<format>', <bytes>)
```

Example

```
>>> pack('>hhI', 1, 2, 3)  
b'\x00\x01\x00\x02\x00\x00\x00\x03'  
>>> unpack('>hhI', b'\x00\x01\x00\x02\x00\x00\x00\x03')  
(1, 2, 3)
```

Format

For standard type sizes start format string with:

- '=' - system's byte order (usually little-endian)
- '<' - little-endian
- '>' - big-endian (also '!')

Integer types. Use a capital letter for unsigned type. Minimum and standard sizes are in brackets:

- 'x' - pad byte
- 'b' - char (1/1)
- 'h' - short (2/2)
- 'i' - int (2/4)
- 'l' - long (4/4)
- 'q' - long long (8/8)

Floating point types:

- 'f' - float (4/4)
- 'd' - double (8/8)

Array

List that can only hold numbers of a predefined type. Available types and their minimum sizes in bytes are listed above. Sizes and byte order are always determined by the system.

```
from array import array  
<array> = array('<typecode>', <collection>) # Array from collection of numbers.  
<array> = array('<typecode>', <bytes>) # Array from bytes object.  
<array> = array('<typecode>', <array>) # Treats array as a sequence of numbers.  
<bytes> = bytes(<array>) # Or: <array>.tobytes()  
<file>.write(<array>) # Writes array to the binary file.
```

Memory View

- A sequence object that points to the memory of another object.
- Each element can reference a single or multiple consecutive bytes, depending on format.
- Order and number of elements can be changed with slicing.
- Casting only works between char and other types and uses system's sizes and byte order.

```
<mview> = memoryview(<bytes/bytearray/array>) # Immutable if bytes, else mutable.
<real> = <mview>[<index>] # Returns an int or a float.
<mview> = <mview>[<slice>] # Mview with rearranged elements.
<mview> = <mview>.cast('<typecode>') # Casts memoryview to the new format.
<mview>.release() # Releases the object's memory buffer.
```

Decode

```
<bytes> = bytes(<mview>) # Creates a new bytes object.
<bytes> = <bytes>.join(<coll_of_mviews>) # Joins mviews using bytes object as sep.
<array> = array('<typecode>', <mview>) # Treats mview as a sequence of numbers.
<file>.write(<mview>) # Writes mview to the binary file.
```

```
<list> = list(<mview>) # Returns list of ints or floats.
<str> = str(<mview>, 'utf-8') # Treats mview as a bytes object.
<int> = int.from_bytes(<mview>, ...) # `byteorder='big/little', signed=False`.
'<hex>' = <mview>.hex() # Treats mview as a bytes object.
```

Deque

A thread-safe list with efficient appends and pops from either side. Pronounced "deck".

```
from collections import deque
<deque> = deque(<collection>, maxlen=None)
```

```
<deque>.appendleft(<el>) # Opposite element is dropped if full.
<deque>.extendleft(<collection>) # Collection gets reversed.
<el> = <deque>.popleft() # Raises IndexError if empty.
<deque>.rotate(n=1) # Rotates elements to the right.
```

Threading

- CPython interpreter can only run a single thread at a time.
- That is why using multiple threads won't result in a faster execution, unless at least one of the threads contains an I/O operation.

```
from threading import Thread, RLock, Semaphore, Event, Barrier
from concurrent.futures import ThreadPoolExecutor
```

Thread

```
<Thread> = Thread(target=<function>) # Use `args=<collection>` to set the arguments.
<Thread>.start() # Starts the thread.
<bool> = <Thread>.is_alive() # Checks if the thread has finished executing.
<Thread>.join() # Waits for the thread to finish.
```

- Use '**kwargs=<dict>**' to pass keyword arguments to the function.
- Use '**daemon=True**', or the program will not be able to exit while the thread is alive.

Lock

```
<lock> = RLock() # Lock that can only be released by the owner.
<lock>.acquire() # Waits for the lock to be available.
<lock>.release() # Makes the lock available again.
```

Or:

```
with <lock>:
    ...
# Enters the block by calling acquire(),
# and exits it with release().
```

Semaphore, Event, Barrier

```
<Semaphore> = Semaphore(value=1)
<Event>      = Event()
<Barrier>    = Barrier(n_times)
# Lock that can be acquired by 'value' threads.
# Method wait() blocks until set() is called.
# Wait() blocks until it's called n_times.
```

Thread Pool Executor

Object that manages thread execution.

```
<Exec> = ThreadPoolExecutor(max_workers=None)
<Exec>.shutdown(wait=True)
# Or: `with ThreadPoolExecutor() as <name>: ...`
# Blocks until all threads finish executing.

<iter> = <Exec>.map(<func>, <args_1>, ...)
<Futr> = <Exec>.submit(<func>, <arg_1>, ...)
<bool> = <Futr>.done()
<obj>  = <Futr>.result()
# A multithreaded and non-lazy map().
# Starts a thread and returns its Future object.
# Checks if the thread has finished executing.
# Waits for thread to finish and returns result.
```

Queue

A thread-safe FIFO queue. For LIFO queue use LifoQueue.

```
from queue import Queue
<Queue> = Queue(maxsize=0)

<Queue>.put(<el>)
<Queue>.put_nowait(<el>)
<el> = <Queue>.get()
<el> = <Queue>.get_nowait()
# Blocks until queue stops being full.
# Raises queue.Full exception if full.
# Blocks until queue stops being empty.
# Raises queue.Empty exception if empty.
```

Operator

Module of functions that provide the functionality of operators.

```
from operator import add, sub, mul, truediv, floordiv, mod, pow, neg, abs
from operator import eq, ne, lt, le, gt, ge
from operator import and_, or_, xor, not_
from operator import itemgetter, attrgetter, methodcaller
```

```
import operator as op
elementwise_sum = map(op.add, list_a, list_b)
sorted_by_second = sorted(<collection>, key=op.itemgetter(1))
sorted_by_both = sorted(<collection>, key=op.itemgetter(1, 0))
product_of_elems = functools.reduce(op.mul, <collection>)
union_of_sets = functools.reduce(op.or_, <coll_of_sets>)
LogicOp = enum.Enum('LogicOp', {'AND': op.and_, 'OR': op.or_})
last_el = op.methodcaller('pop')(<list>)
```

Introspection

Inspecting code at runtime.

Variables

```
<list> = dir() # Names of local variables (incl. functions).
<dict> = vars() # Dict of local variables. Also locals().
<dict> = globals() # Dict of global variables.
```

Attributes

```
<list> = dir(<object>) # Names of object's attributes (incl. methods).
<dict> = vars(<object>) # Dict of writable attributes. Also <obj>.__dict__.
<bool> = hasattr(<object>, '<attr_name>') # Checks if getattr() raises an AttributeError.
value = getattr(<object>, '<attr_name>') # Raises AttributeError if attribute is missing.
setattr(<object>, '<attr_name>', value) # Only works on objects with __dict__ attribute.
delattr(<object>, '<attr_name>') # Equivalent to `del <object>.<attr_name>`.
```

Parameters

```
from inspect import signature
<Sig> = signature(<function>) # Function's Signature object.
<dict> = <Sig>.parameters # Dict of function's Parameter objects.
<str> = <Param>.name # Parameter's name.
<memb> = <Param>.kind # Member of ParameterKind enum.
```

Metaprogramming

Code that generates code.

Type

Type is the root class. If only passed an object it returns its type (class). Otherwise it creates a new class.

```
<class> = type('<class_name>', <parents_tuple>, <attributes_dict>)
```

```
>>> Z = type('Z', (), {'a': 'abcde', 'b': 12345})
>>> z = Z()
```

Meta Class

A class that creates classes.

```
def my_meta_class(name, parents, attrs):
    attrs['a'] = 'abcde'
    return type(name, parents, attrs)
```

Or:

```
class MyMetaClass(type):
    def __new__(cls, name, parents, attrs):
        attrs['a'] = 'abcde'
        return type.__new__(cls, name, parents, attrs)
```

- New() is a class method that gets called before init(). If it returns an instance of its class, then that instance gets passed to init() as a 'self' argument.
- It receives the same arguments as init(), except for the first one that specifies the desired type of the returned instance (MyMetaClass in our case).

- Like in our case, `new()` can also be called directly, usually from a `new()` method of a child class (`def __new__(cls): return super().__new__(cls)`).
- The only difference between the examples above is that `my_meta_class()` returns a class of type `type`, while `MyMetaClass()` returns a class of type `MyMetaClass`.

Metaclass Attribute


Right before a class is created it checks if it has the 'metaclass' attribute defined. If not, it recursively checks if any of his parents has it defined and eventually comes to `type()`.

```
class MyClass(metaclass=MyMetaClass):
    b = 12345
```

```
>>> MyClass.a, MyClass.b
('abcde', 12345)
```


Type Diagram

```
type(MyClass) == MyMetaClass # MyClass is an instance of MyMetaClass.
type(MyMetaClass) == type # MyMetaClass is an instance of type.
```

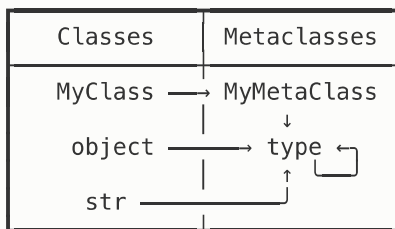

Inheritance Diagram

```
MyClass.__base__ == object # MyClass is a subclass of object.
MyMetaClass.__base__ == type # MyMetaClass is a subclass of type.
```

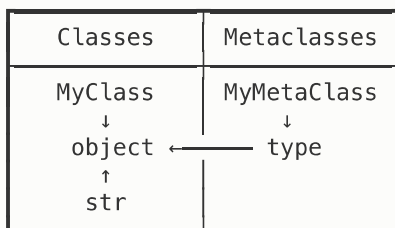

Eval

```
>>> from ast import literal_eval
>>> literal_eval('[1, 2, 3]')
[1, 2, 3]
>>> literal_eval('1 + 2')
ValueError: malformed node or string
```

Coroutines

- Coroutines have a lot in common with threads, but unlike threads, they only give up control when they call another coroutine and they don't use as much memory.
- Coroutine definition starts with `'async'` and its call with `'await'`.
- `'asyncio.run(<coroutine>')` is the main entry point for asynchronous programs.
- Functions `wait()`, `gather()` and `as_completed()` can be used when multiple coroutines need to be started at the same time.
- Asyncio module also provides its own [Queue](#), [Event](#), [Lock](#) and [Semaphore](#) classes.

Runs a terminal game where you control an asterisk that must avoid numbers:

```
import asyncio, collections, curses, enum, random

P = collections.namedtuple('P', 'x y')          # Position
D = enum.Enum('D', 'n e s w')                  # Direction

def main(screen):
    curses.curs_set(0)                          # Makes cursor invisible.
    screen.nodelay(True)                        # Makes getch() non-blocking.
    asyncio.run(main_coroutine(screen))         # Starts running asyncio code.

async def main_coroutine(screen):
    state = {'*': P(0, 0), **{id_: P(30, 10) for id_ in range(10)}}
    moves = asyncio.Queue()
    coros = (*(random_controller(id_, moves) for id_ in range(10)),
             human_controller(screen, moves),
             model(moves, state, *screen.getmaxyx()),
             view(state, screen))
    await asyncio.wait(coros, return_when=asyncio.FIRST_COMPLETED)

async def random_controller(id_, moves):
    while True:
        d = random.choice(list(D))
        moves.put_nowait((id_, d))
        await asyncio.sleep(random.random() / 2)

async def human_controller(screen, moves):
    while True:
        ch = screen.getch()
        key_mappings = {259: D.n, 261: D.e, 258: D.s, 260: D.w}
        if ch in key_mappings:
            moves.put_nowait('*', key_mappings[ch])
        await asyncio.sleep(0.01)

async def model(moves, state, height, width):
    while state['*'] not in {p for id_, p in state.items() if id_ != '*'}:
        id_, d = await moves.get()
        p = state[id_]
        deltas = {D.n: P(0, -1), D.e: P(1, 0), D.s: P(0, 1), D.w: P(-1, 0)}
        new_p = P(p.x + deltas[d].x, p.y + deltas[d].y)
        if 0 <= new_p.x < width-1 and 0 <= new_p.y < height:
            state[id_] = new_p

async def view(state, screen):
    while True:
        screen.clear()
        for id_, p in state.items():
            screen.addstr(p.y, p.x, str(id_))
        await asyncio.sleep(0.01)

if __name__ == '__main__':
    curses.wrapper(main)
```

Libraries

Progress Bar

```
# $ pip3 install tqdm
>>> from tqdm import tqdm
>>> from time import sleep
>>> for el in tqdm([1, 2, 3], desc='Processing'):
...     sleep(1)
Processing: 100%|██████████| 3/3 [00:03<00:00, 1.00s/it]
```

Plot

```
# $ pip3 install matplotlib
import matplotlib.pyplot as plt
plt.plot(<x_data>, <y_data> [, label=<str>]) # Or: plt.plot(<y_data>)
plt.legend() # Adds a legend.
plt.savefig(<path>) # Saves the figure.
plt.show() # Displays the figure.
plt.clf() # Clears the figure.
```

Table

Prints a CSV file as an ASCII table:

```
# $ pip3 install tabulate
import csv, tabulate
with open('test.csv', encoding='utf-8', newline='') as file:
    rows = csv.reader(file)
    header = [a.title() for a in next(rows)]
    table = tabulate.tabulate(rows, header)
    print(table)
```

Curses

Runs a basic file explorer in the terminal:

```
from curses import wrapper, ascii, A_REVERSE, KEY_UP, KEY_DOWN, KEY_LEFT, KEY_RIGHT, KEY_ENTER
from os import listdir, path, chdir

def main(screen):
    ch, first, selected, paths = 0, 0, 0, listdir()
    while ch != ascii.ESC:
        height, _ = screen.getmaxyx()
        screen.clear()
        for y, a_path in enumerate(paths[first : first+height]):
            screen.addstr(y, 0, a_path, A_REVERSE * (selected == first + y))
        ch = screen.getch()
        selected += (ch == KEY_DOWN) - (ch == KEY_UP)
        selected = max(0, min(len(paths)-1, selected))
        first += (first <= selected - height) - (first > selected)
        if ch in [KEY_LEFT, KEY_RIGHT, KEY_ENTER, 10, 13]:
            new_dir = '..' if ch == KEY_LEFT else paths[selected]
            if path.isdir(new_dir):
                chdir(new_dir)
                first, selected, paths = 0, 0, listdir()

if __name__ == '__main__':
    wrapper(main)
```


Logging

```
# $ pip3 install loguru
from loguru import logger
```

```
logger.add('debug_{time}.log', colorize=True) # Connects a log file.
logger.add('error_{time}.log', level='ERROR') # Another file for errors or higher.
logger.<level>('A logging message.')
```

- Levels: 'debug', 'info', 'success', 'warning', 'error', 'critical'.

Exceptions

Exception description, stack trace and values of variables are appended automatically.

```
try:
    ...
except <exception>:
    logger.exception('An error happened.')
```

Rotation

Argument that sets a condition when a new log file is created.

```
rotation=<int>|<datetime.timedelta>|<datetime.time>|<str>
```

- '<int>' - Max file size in bytes.
- '<timedelta>' - Max age of a file.
- '<time>' - Time of day.
- '<str>' - Any of above as a string: '100 MB', '1 month', 'monday at 12:00', ...

Retention

Sets a condition which old log files get deleted.

```
retention=<int>|<datetime.timedelta>|<str>
```

- '<int>' - Max number of files.
- '<timedelta>' - Max age of a file.
- '<str>' - Max age as a string: '1 week, 3 days', '2 months', ...

Scraping

Scrapes Python's URL, version number and logo from its Wikipedia page:

```
# $ pip3 install requests beautifulsoup4
import requests, bs4, sys

WIKI_URL = 'https://en.wikipedia.org/wiki/Python_(programming_language)'
try:
    html = requests.get(WIKI_URL).text
    document = bs4.BeautifulSoup(html, 'html.parser')
    table = document.find('table', class_='infobox vevent')
    python_url = table.find('th', text='Website').next_sibling.a['href']
    version = table.find('th', text='Stable release').next_sibling.strings.__next__()
    logo_url = table.find('img')['src']
    logo = requests.get(f'https://{logo_url}').content
    with open('test.png', 'wb') as file:
        file.write(logo)
    print(python_url, version)
except requests.exceptions.ConnectionError:
    print("You've got problems with connection.", file=sys.stderr)
```

Web

```
# $ pip3 install bottle
from bottle import run, route, static_file, template, post, request, response
import json
```

Run

```
run(host='localhost', port=8080)      # Runs locally.
run(host='0.0.0.0', port=80)         # Runs globally.
```

Static Request

```
@route('/img/<image>')
def send_image(image):
    return static_file(image, 'img_dir/', mimetype='image/png')
```

Dynamic Request

```
@route('/<sport>')
def send_page(sport):
    return template('<h1>{{title}}</h1>', title=sport)
```

REST Request

```
@post('/<sport>/odds')
def odds_handler(sport):
    team = request.forms.get('team')
    home_odds, away_odds = 2.44, 3.29
    response.headers['Content-Type'] = 'application/json'
    response.headers['Cache-Control'] = 'no-cache'
    return json.dumps([team, home_odds, away_odds])
```

Test:

```
# $ pip3 install requests
>>> import threading, requests
>>> threading.Thread(target=run, daemon=True).start()
>>> url = 'http://localhost:8080/football/odds'
>>> data = {'team': 'arsenal f.c.'}
>>> response = requests.post(url, data=data)
>>> response.json()
['arsenal f.c.', 2.44, 3.29]
```

Profiling

Stopwatch

```
from time import time
start_time = time()                # Seconds since the Epoch.
...
duration = time() - start_time
```

High performance:

```
from time import perf_counter
start_time = perf_counter()        # Seconds since the restart.
...
duration = perf_counter() - start_time
```

Timing a Snippet

```
>>> from timeit import timeit
>>> timeit("'.join(str(i) for i in range(100))",
...       number=10000, globals=globals(), setup='pass')
0.34986
```

Profiling by Line

```
# $ pip3 install line_profiler memory_profiler
@profile
def main():
    a = [*range(10000)]
    b = {*range(10000)}
main()
```

```
$ kernprof -lv test.py
Line #      Hits          Time      Per Hit      % Time  Line Contents
=====
     1                               @profile
     2                               def main():
     3          1      955.0         955.0       43.7      a = [*range(10000)]
     4          1     1231.0        1231.0       56.3      b = {*range(10000)}
```

```
$ python3 -m memory_profiler test.py
Line #      Mem usage      Increment   Line Contents
=====
     1      37.668 MiB      37.668 MiB   @profile
     2
     3      38.012 MiB       0.344 MiB   a = [*range(10000)]
     4      38.477 MiB       0.465 MiB   b = {*range(10000)}
```

Call Graph

Generates a PNG image of a call graph with highlighted bottlenecks:

```
# $ pip3 install pycallgraph2
from pycallgraph2 import output, PyCallGraph
from datetime import datetime
filename = f'profile-{datetime.now():%Y%m%d%H%M%S}.png'
drawer = output.GraphvizOutput(output_file=filename)
with PyCallGraph(drawer):
    <code_to_be_profiled>
```

NumPy

Array manipulation mini-language. It can run up to one hundred times faster than the equivalent Python code. An even faster alternative that runs on a GPU is called CuPy.

```
# $ pip3 install numpy
import numpy as np
```

```
<array> = np.array(<list>)
<array> = np.arange(from_inclusive, to_exclusive, ±step_size)
<array> = np.ones(<shape>)
<array> = np.random.randint(from_inclusive, to_exclusive, <shape>)
```

```
<array>.shape = <shape>
<view> = <array>.reshape(<shape>)
<view> = np.broadcast_to(<array>, <shape>)
```

```
<array> = <array>.sum(axis)
indexes = <array>.argmin(axis)
```

- Shape is a tuple of dimension sizes.
- Axis is an index of the dimension that gets collapsed. Leftmost dimension has index 0.

Indexing

```
<el> = <2d_array>[row_index, column_index]
<1d_view> = <2d_array>[row_index]
<1d_view> = <2d_array>[:, column_index]
```

```
<1d_array> = <2d_array>[row_indexes, column_indexes]
<2d_array> = <2d_array>[row_indexes]
<2d_array> = <2d_array>[:, column_indexes]
```

```
<2d_bools> = <2d_array> ><== <el>
<1d_array> = <2d_array>[<2d_bools>]
```

Broadcasting

Broadcasting is a set of rules by which NumPy functions operate on arrays of different sizes and/or dimensions.

```
left = [[0.1], [0.6], [0.8]] # Shape: (3, 1)
right = [ 0.1 , 0.6 , 0.8 ] # Shape: (3)
```

1. If array shapes differ in length, left-pad the shorter shape with ones:

```
left = [[0.1], [0.6], [0.8]] # Shape: (3, 1)
right = [[0.1 , 0.6 , 0.8]] # Shape: (1, 3) ← !
```

2. If any dimensions differ in size, expand the ones that have size 1 by duplicating their elements:

```
left = [[0.1, 0.1, 0.1], [0.6, 0.6, 0.6], [0.8, 0.8, 0.8]] # Shape: (3, 3) ← !
right = [[0.1, 0.6, 0.8], [0.1, 0.6, 0.8], [0.1, 0.6, 0.8]] # Shape: (3, 3) ← !
```

3. If neither non-matching dimension has size 1, raise an error.

Example

For each point returns index of its nearest point ($[0.1, 0.6, 0.8] \Rightarrow [1, 2, 1]$):

```
>>> points = np.array([0.1, 0.6, 0.8])
[ 0.1, 0.6, 0.8]
>>> wrapped_points = points.reshape(3, 1)
[[ 0.1],
 [ 0.6],
 [ 0.8]]
>>> distances = wrapped_points - points
[[ 0. , -0.5, -0.7],
 [ 0.5, 0. , -0.2],
 [ 0.7, 0.2, 0. ]]
>>> distances = np.abs(distances)
[[ 0. , 0.5, 0.7],
 [ 0.5, 0. , 0.2],
 [ 0.7, 0.2, 0. ]]
>>> i = np.arange(3)
[0, 1, 2]
>>> distances[i, i] = np.inf
[[ inf, 0.5, 0.7],
 [ 0.5, inf, 0.2],
 [ 0.7, 0.2, inf]]
>>> distances.argmin(1)
[1, 2, 1]
```

Image

```
# $ pip3 install pillow
from PIL import Image
```

```
<Image> = Image.new('<mode>', (width, height)) # Also: `color=<int/tuple/str>`.
<Image> = Image.open(<path>) # Identifies format based on file contents.
<Image> = <Image>.convert('<mode>') # Converts image to the new mode.
<Image>.save(<path>) # Selects format based on the path extension.
<Image>.show() # Opens image in default preview app.
```

```
<int/tuple> = <Image>.getpixel((x, y)) # Returns a pixel.
<Image>.putpixel((x, y), <int/tuple>) # Writes a pixel to the image.
<ImagingCore> = <Image>.getdata() # Returns a sequence of pixels.
<Image>.putdata(<list/ImagingCore>) # Writes a sequence of pixels.
<Image>.paste(<Image>, (x, y)) # Writes an image to the image.
```

```
<2d_array> = np.array(<Image_L>) # Creates NumPy array from greyscale image.
<3d_array> = np.array(<Image_RGB>) # Creates NumPy array from color image.
<Image> = Image.fromarray(<array>) # Creates image from NumPy array of floats.
```

Modes

- **'1'** - 1-bit pixels, black and white, stored with one pixel per byte.
- **'L'** - 8-bit pixels, greyscale.
- **'RGB'** - 3x8-bit pixels, true color.
- **'RGBA'** - 4x8-bit pixels, true color with transparency mask.
- **'HSV'** - 3x8-bit pixels, Hue, Saturation, Value color space.

Examples

Creates a PNG image of a rainbow gradient:

```
WIDTH, HEIGHT = 100, 100
size = WIDTH * HEIGHT
hues = (255 * i/size for i in range(size))
img = Image.new('HSV', (WIDTH, HEIGHT))
img.putdata([(int(h), 255, 255) for h in hues])
img.convert('RGB').save('test.png')
```

Adds noise to a PNG image:

```
from random import randint
add_noise = lambda value: max(0, min(255, value + randint(-20, 20)))
img = Image.open('test.png').convert('HSV')
img.putdata([(add_noise(h), s, v) for h, s, v in img.getdata()])
img.convert('RGB').save('test.png')
```

Image Draw

```
from PIL import ImageDraw
<ImageDraw> = ImageDraw.Draw(<Image>)
```

```
<ImageDraw>.point((x, y), fill=None)
<ImageDraw>.line((x1, y1, x2, y2 [, ...]), fill=None, width=0, joint=None)
<ImageDraw>.arc((x1, y1, x2, y2), from_deg, to_deg, fill=None, width=0)
<ImageDraw>.rectangle((x1, y1, x2, y2), fill=None, outline=None, width=0)
<ImageDraw>.polygon((x1, y1, x2, y2 [, ...]), fill=None, outline=None)
<ImageDraw>.ellipse((x1, y1, x2, y2), fill=None, outline=None, width=0)
```

- Use **'fill=<color>'** to set the primary color.
- Use **'outline=<color>'** to set the secondary color.
- Color can be specified as an int, tuple, **'#rrggbb[aa]'** string or a color name.

Animation

Creates a GIF of a bouncing ball:

```
# $ pip3 install imageio
from PIL import Image, ImageDraw
import imageio
WIDTH, R = 126, 10
frames = []
for velocity in range(1, 16):
    y = sum(range(velocity))
    frame = Image.new('L', (WIDTH, WIDTH))
    draw = ImageDraw.Draw(frame)
    draw.ellipse((WIDTH/2-R, y, WIDTH/2+R, y+R*2), fill='white')
    frames.append(frame)
frames += reversed(frames[1:-1])
imageio.mimsave('test.gif', frames, duration=0.03)
```

Audio

```
import wave
```

```
<Wave_read> = wave.open('<path>', 'rb')           # Opens the WAV file.
framerate    = <Wave_read>.getframerate()        # Number of frames per second.
nchannels    = <Wave_read>.getnchannels()        # Number of samples per frame.
sampwidth    = <Wave_read>.getsampwidth()        # Sample size in bytes.
nframes      = <Wave_read>.getnframes()          # Number of frames.
<params>     = <Wave_read>.getparams()            # Immutable collection of above.
<bytes>      = <Wave_read>.readframes(nframes)    # Returns next 'nframes' frames.
```

```
<Wave_write> = wave.open('<path>', 'wb')          # Truncates existing file.
<Wave_write>.setframerate(<int>)                 # 44100 for CD, 48000 for video.
<Wave_write>.setnchannels(<int>)                 # 1 for mono, 2 for stereo.
<Wave_write>.setsampwidth(<int>)                 # 2 for CD quality sound.
<Wave_write>.setparams(<params>)                 # Sets all parameters.
<Wave_write>.writeframes(<bytes>)                 # Appends frames to the file.
```

- Bytes object contains a sequence of frames, each consisting of one or more samples.
- In a stereo signal, the first sample of a frame belongs to the left channel.
- Each sample consists of one or more bytes that, when converted to an integer, indicate the displacement of a speaker membrane at a given moment.
- If sample width is one, then the integer should be encoded unsigned.
- For all other sizes, the integer should be encoded signed with little-endian byte order.

Sample Values

sampwidth	min	zero	max
1	0	128	255
2	-32768	0	32767
3	-8388608	0	8388607
4	-2147483648	0	2147483647

Read Float Samples from WAV File

```
def read_wav_file(filename):
    def get_int(bytes_obj):
        an_int = int.from_bytes(bytes_obj, 'little', signed=sampwidth!=1)
        return an_int - 128 * (sampwidth == 1)
    with wave.open(filename, 'rb') as file:
        sampwidth = file.getsampwidth()
        frames = file.readframes(-1)
        bytes_samples = (frames[i : i+sampwidth] for i in range(0, len(frames), sampwidth))
        return [get_int(b) / pow(2, sampwidth * 8 - 1) for b in bytes_samples]
```

Write Float Samples to WAV File

```
def write_to_wav_file(filename, float_samples, nchannels=1, sampwidth=2, framerate=44100):
    def get_bytes(a_float):
        a_float = max(-1, min(1 - 2e-16, a_float))
        a_float += sampwidth == 1
        a_float *= pow(2, sampwidth * 8 - 1)
        return int(a_float).to_bytes(sampwidth, 'little', signed=sampwidth!=1)
    with wave.open(filename, 'wb') as file:
        file.setnchannels(nchannels)
        file.setsampwidth(sampwidth)
        file.setframerate(framerate)
        file.writeframes(b''.join(get_bytes(f) for f in float_samples))
```

Examples

Saves a sine wave to a mono WAV file:

```
from math import pi, sin
samples_f = (sin(i * 2 * pi * 440 / 44100) for i in range(100000))
write_to_wav_file('test.wav', samples_f)
```

Adds noise to a mono WAV file:

```
from random import random
add_noise = lambda value: value + (random() - 0.5) * 0.03
samples_f = (add_noise(f) for f in read_wav_file('test.wav'))
write_to_wav_file('test.wav', samples_f)
```

Plays a WAV file:

```
# $ pip3 install simpleaudio
from simpleaudio import play_buffer
with wave.open('test.wav', 'rb') as file:
    p = file.getparams()
    frames = file.readframes(-1)
    play_buffer(frames, p.nchannels, p.sampwidth, p.framerate)
```

Text to Speech

```
# $ pip3 install pyttsx3
import pyttsx3
engine = pyttsx3.init()
engine.say('Sally sells seashells by the seashore.')
engine.runAndWait()
```

Synthesizer

Plays Popcorn by Gershon Kingsley:

```
# $ pip3 install simpleaudio
import math, struct, simpleaudio
from itertools import repeat, chain
F = 44100
P1 = '71J,69J,,71J,66J,,62J,66J,,59J,,, '
P2 = '71J,73J,,74J,73J,,74J,,71J,,73J,71J,,73J,,69J,,71J,69J,,71J,,67J,,71J,,, '
get_pause = lambda seconds: repeat(0, int(seconds * F))
sin_f = lambda i, hz: math.sin(i * 2 * math.pi * hz / F)
get_wave = lambda hz, seconds: (sin_f(i, hz) for i in range(int(seconds * F)))
get_hz = lambda key: 8.176 * 2 ** (int(key) / 12)
parse_note = lambda note: (get_hz(note[:2]), 1/4 if 'J' in note else 1/8)
get_samples = lambda note: get_wave(*parse_note(note)) if note else get_pause(1/8)
samples_f = chain.from_iterable(get_samples(n) for n in f'{P1}{P2}'.split(','))
samples_b = b''.join(struct.pack('<h', int(f * 30000)) for f in samples_f)
simpleaudio.play_buffer(samples_b, 1, 2, F)
```

Pygame

Basic Example

```
# $ pip3 install pygame
import pygame as pg
pg.init()
screen = pg.display.set_mode((500, 500))
rect = pg.Rect(240, 240, 20, 20)
while all(event.type != pg.QUIT for event in pg.event.get()):
    deltas = {pg.K_UP: (0, -1), pg.K_RIGHT: (1, 0), pg.K_DOWN: (0, 1), pg.K_LEFT: (-1, 0)}
    for key_code, is_pressed in enumerate(pg.key.get_pressed()):
        rect = rect.move(deltas[key_code]) if key_code in deltas and is_pressed else rect
    screen.fill((0, 0, 0))
    pg.draw.rect(screen, (255, 255, 255), rect)
pg.display.flip()
```

Rectangle

Object for storing rectangular coordinates.

```
<Rect> = pg.Rect(x, y, width, height) # Floats get truncated into ints.
<int> = <Rect>.x/y/centerx/centery/... # Top, right, bottom, left. Allows assignments.
<tup.> = <Rect>.topleft/center/... # Topright, bottomright, bottomleft.
<Rect> = <Rect>.move((x, y)) # Use move_ip() to move in place.

<bool> = <Rect>.collidepoint((x, y)) # Checks if rectangle contains a point.
<bool> = <Rect>.collidect(<Rect>) # Checks if two rectangles overlap.
<int> = <Rect>.collidelist(<list_of_Rect>) # Returns index of first colliding Rect or -1.
<list> = <Rect>.collidelistall(<list_of_Rect>) # Returns indexes of all colliding Rects.
```

Surface

Object for representing images.

```
<Surf> = pg.display.set_mode((width, height)) # Returns display surface.
<Surf> = pg.Surface((width, height), ...) # New RGB surface. Add `pg.SRCALPHA` for RGBA.
<Surf> = pg.image.load('<path>') # Loads the image. Format depends on source.
<Surf> = <Surf>.subsurface(<Rect>) # Returns a subsurface.

<Surf>.fill(color) # Tuple, Color('#rrggbb[aa]') or Color(<name>).
<Surf>.set_at((x, y), color) # Updates pixel.
<Surf>.blit(<Surf>, (x, y)) # Draws passed surface to the surface.

from pygame.transform import scale, ...
<Surf> = scale(<Surf>, (width, height)) # Returns scaled surface.
<Surf> = rotate(<Surf>, degrees) # Returns rotated and scaled surface.
<Surf> = flip(<Surf>, x_bool, y_bool) # Returns flipped surface.

from pygame.draw import line, ...
line(<Surf>, color, (x1, y1), (x2, y2), width) # Draws a line to the surface.
arc(<Surf>, color, <Rect>, from_rad, to_rad) # Also: ellipse(<Surf>, color, <Rect>)
rect(<Surf>, color, <Rect>) # Also: polygon(<Surf>, color, points)
```

Font

```
<Font> = pg.font.SysFont('<name>', size) # Loads the system font or default if missing.
<Font> = pg.font.Font('<path>', size) # Loads the TTF file. Pass None for default.
<Surf> = <Font>.render(text, antialias, color) # Background color can be specified at the end.
```

Sound

```
<Sound> = pg.mixer.Sound('<path>') # Loads the WAV file.
<Sound>.play() # Starts playing the sound.
```


Basic Mario Brothers Example

```
import collections, dataclasses, enum, io, itertools as it, pygame as pg, urllib.request
from random import randint

P = collections.namedtuple('P', 'x y')           # Position
D = enum.Enum('D', 'n e s w')                 # Direction
SIZE, MAX_SPEED = 50, P(5, 10)                # Screen size, Speed limit

def main():
    def get_screen():
        pg.init()
        return pg.display.set_mode(2 * [SIZE*16])
    def get_images():
        url = 'https://gto76.github.io/python-cheatsheet/web/mario_bros.png'
        img = pg.image.load(io.BytesIO(urllib.request.urlopen(url).read()))
        return [img.subsurface(get_rect(x, 0)) for x in range(img.get_width() // 16)]
    def get_mario():
        Mario = dataclasses.make_dataclass('Mario', 'rect spd facing_left frame_cycle'.split())
        return Mario(get_rect(1, 1), P(0, 0), False, it.cycle(range(3)))
    def get_tiles():
        positions = [p for p in it.product(range(SIZE), repeat=2) if {*p} & {0, SIZE-1}] + \
            [(randint(1, SIZE-2), randint(2, SIZE-2)) for _ in range(SIZE**2 // 10)]
        return [get_rect(*p) for p in positions]
    def get_rect(x, y):
        return pg.Rect(x*16, y*16, 16, 16)
    run(get_screen(), get_images(), get_mario(), get_tiles())

def run(screen, images, mario, tiles):
    clock = pg.time.Clock()
    while all(event.type != pg.QUIT for event in pg.event.get()):
        keys = {pg.K_UP: D.n, pg.K_RIGHT: D.e, pg.K_DOWN: D.s, pg.K_LEFT: D.w}
        pressed = {keys.get(i) for i, on in enumerate(pg.key.get_pressed()) if on}
        update_speed(mario, tiles, pressed)
        update_position(mario, tiles)
        draw(screen, images, mario, tiles, pressed)
        clock.tick(28)

def update_speed(mario, tiles, pressed):
    x, y = mario.spd
    x += 2 * ((D.e in pressed) - (D.w in pressed))
    x -= x // abs(x) if x else 0
    y += 1 if D.s not in get_boundaries(mario.rect, tiles) else (D.n in pressed) * -10
    mario.spd = P(*[max(-limit, min(limit, s)) for limit, s in zip(MAX_SPEED, P(x, y))])

def update_position(mario, tiles):
    x, y = mario.rect.topleft
    n_steps = max(abs(s) for s in mario.spd)
    for _ in range(n_steps):
        mario.spd = stop_on_collision(mario.spd, get_boundaries(mario.rect, tiles))
        x, y = x + mario.spd.x/n_steps, y + mario.spd.y/n_steps
    mario.rect.topleft = x, y

def get_boundaries(rect, tiles):
    deltas = {D.n: P(0, -1), D.e: P(1, 0), D.s: P(0, 1), D.w: P(-1, 0)}
    return {d for d, delta in deltas.items() if rect.move(delta).collidelist(tiles) != -1}

def stop_on_collision(spd, bounds):
    return P(x=0 if (D.w in bounds and spd.x < 0) or (D.e in bounds and spd.x > 0) else spd.x,
            y=0 if (D.n in bounds and spd.y < 0) or (D.s in bounds and spd.y > 0) else spd.y)

def draw(screen, images, mario, tiles, pressed):
    def get_frame_index():
        if D.s not in get_boundaries(mario.rect, tiles):
            return 4
        return next(mario.frame_cycle) if {D.w, D.e} & pressed else 6
    screen.fill((85, 168, 255))
    mario.facing_left = (D.w in pressed) if {D.w, D.e} & pressed else mario.facing_left
    screen.blit(images[get_frame_index() + mario.facing_left * 9], mario.rect)
    for rect in tiles:
        screen.blit(images[18 if {*rect.topleft} & {0, (SIZE-1)*16} else 19], rect)
    pg.display.flip()

if __name__ == '__main__':
    main()
```

Pandas

```
# $ pip3 install pandas
import pandas as pd
from pandas import Series, DataFrame
```

Series

Ordered dictionary with a name.

```
>>> Series([1, 2], index=['x', 'y'], name='a')
x    1
y    2
Name: a, dtype: int64
```

```
<Sr> = Series(<list>)           # Assigns RangeIndex starting at 0.
<Sr> = Series(<dict>)          # Takes dictionary's keys for index.
<Sr> = Series(<dict/Series>, index=<list>) # Only keeps items with keys specified in index.
```

```
<el> = <Sr>.loc[key]           # Or: <Sr>.iloc[index]
<Sr> = <Sr>.loc[keys]          # Or: <Sr>.iloc[indexes]
<Sr> = <Sr>.loc[from_key : to_key_inclusive] # Or: <Sr>.iloc[from_i : to_i_exclusive]
```

```
<el> = <Sr>[key/index]         # Or: <Sr>.key
<Sr> = <Sr>[keys/indexes]      # Or: <Sr>[<key_range/range>]
<Sr> = <Sr>[bools]             # Or: <Sr>.i/loc[bools]
```

```
<Sr> = <Sr> ><== <el/Sr>       # Returns a Series of bools.
<Sr> = <Sr> +<*/ <el/Sr>      # Items with non-matching keys get value NaN.
```

```
<Sr> = <Sr>.append(<Sr>)       # Or: pd.concat(<coll_of_Sr>)
<Sr> = <Sr>.combine_first(<Sr>) # Adds items that are not yet present.
<Sr>.update(<Sr>)              # Updates items that are already present.
```

Aggregate, Transform, Map:

```
<el> = <Sr>.sum/max/mean/idxmax/all() # Or: <Sr>.aggregate(<agg_func>)
<Sr> = <Sr>.rank/diff/cumsum/ffill/interpl() # Or: <Sr>.agg/transform(<trans_func>)
<Sr> = <Sr>.fillna(<el>)             # Or: <Sr>.apply/agg/transform/map(<map_func>)
```

- The way **'aggregate()'** and **'transform()'** find out whether the passed function accepts an element or the whole Series is by passing it a single value at first and if it raises an error, then they pass it the whole Series.

```
>>> sr = Series([1, 2], index=['x', 'y'])
x    1
y    2
```

	'sum'	['sum']	{'s': 'sum'}
sr.apply(...)	3	sum 3	s 3
sr.agg(...)			

	'rank'	['rank']	{'r': 'rank'}
sr.apply(...)		rank	
sr.agg(...)	x 1	x 1	r x 1
sr.trans(...)	y 2	y 2	y 2

- Last result has a hierarchical index. Use **'<Sr>[key_1, key_2]'** to get its values.

DataFrame

Table with labeled rows and columns.

```
>>> DataFrame([[1, 2], [3, 4]], index=['a', 'b'], columns=['x', 'y'])
  x  y
a  1  2
b  3  4
```

```
<DF> = DataFrame(<list_of_rows>) # Rows can be either lists, dicts or series.
<DF> = DataFrame(<dict_of_columns>) # Columns can be either lists, dicts or series.
```

```
<el> = <DF>.loc[<row_key, column_key>] # Or: <DF>.iloc[<row_index, column_index>]
<Sr/DF> = <DF>.loc[<row_key/s>] # Or: <DF>.iloc[<row_index/es>]
<Sr/DF> = <DF>.loc[:, <column_key/s>] # Or: <DF>.iloc[:, <column_index/es>]
<DF> = <DF>.loc[<row_bools, column_bools>] # Or: <DF>.iloc[<row_bools, column_bools>]
```

```
<Sr/DF> = <DF>[<column_key/s>] # Or: <DF>.column_key
<DF> = <DF>[<row_bools>] # Keeps rows as specified by bools.
<DF> = <DF>[<DF_of_bools>] # Assigns NaN to False values.
```

```
<DF> = <DF> ><== <el/Sr/DF> # Returns DF of bools. Sr is treated as a row.
<DF> = <DF> +-*/* <el/Sr/DF> # Items with non-matching keys get value NaN.
```

```
<DF> = <DF>.set_index(<column_key>) # Replaces row keys with values from a column.
<DF> = <DF>.reset_index() # Moves row keys to a column named index.
<DF> = <DF>.filter('<regex>', axis=1) # Only keeps columns whose key matches the regex.
<DF> = <DF>.melt(id_vars=<column_key/s>) # Converts DataFrame from wide to long format.
```

Merge, Join, Concat:

```
>>> l = DataFrame([[1, 2], [3, 4]], index=['a', 'b'], columns=['x', 'y'])
  x  y
a  1  2
b  3  4
>>> r = DataFrame([[4, 5], [6, 7]], index=['b', 'c'], columns=['y', 'z'])
  y  z
b  4  5
c  6  7
```

	'outer'	'inner'	'left'	Description
<code>l.merge(r, on='y', how=...)</code>	<pre>x y z 0 1 2 . 1 3 4 5 2 . 6 7</pre>	<pre>x y z 3 4 5</pre>	<pre>x y z 1 2 . 3 4 5</pre>	Joins/merges on column. Also accepts <code>left_on</code> and <code>right_on</code> parameters. Uses <code>'inner'</code> by default.
<code>l.join(r, lsuffix='l', rsuffix='r', how=...)</code>	<pre>x yl yr z a 1 2 . . b 3 4 4 5 c . . 6 7</pre>	<pre>x yl yr z 3 4 4 5</pre>	<pre>x yl yr z 1 2 . . 3 4 4 5</pre>	Joins/merges on row keys. Uses <code>'left'</code> by default. If <code>r</code> is a series, it is treated as a column.
<code>pd.concat([l, r], axis=0, join=...)</code>	<pre>x y z a 1 2 . b 3 4 . b . 4 5 c . 6 7</pre>	<pre>y 2 4 4 6</pre>		Adds rows at the bottom. Uses <code>'outer'</code> by default. A series is treated as a column. Use <code>l.append(r)</code> to add a row instead.
<code>pd.concat([l, r], axis=1, join=...)</code>	<pre>x y y z a 1 2 . 5 b 3 4 4 5 c . . 6 7</pre>	<pre>x y y z 3 4 4 5</pre>		Adds columns at the right end. Uses <code>'outer'</code> by default. A series is treated as a column.
<code>l.combine_first(r)</code>	<pre>x y z a 1 2 . b 3 4 5 c . 6 7</pre>			Adds missing rows and columns. Also updates items that contain NaN. <code>R</code> must be a DataFrame.

Aggregate, Transform, Map:

```
<Sr> = <DF>.sum/max/mean/idxmax/all() # Or: <DF>.apply/agg/transform(<agg_func>)
<DF> = <DF>.rank/diff/cumsum/ffill/interpl() # Or: <DF>.apply/agg/transform(<trans_func>)
<DF> = <DF>.fillna(<el>) # Or: <DF>.applymap(<map_func>)
```

- All operations operate on columns by default. Use **'axis=1'** parameter to process the rows instead.

```
>>> df = DataFrame([[1, 2], [3, 4]], index=['a', 'b'], columns=['x', 'y'])
  x  y
a  1  2
b  3  4
```

	'sum'	['sum']	{'x': 'sum'}
df.apply(...)		x y	x 4
df.agg(...)	x 4 y 6	sum 4 6	

	'rank'	['rank']	{'x': 'rank'}
df.apply(...)	x y	x y	x
df.agg(...)	a 1 1	rank rank	a 1
df.trans(...)	b 2 2	a 1 1 b 2 2	b 2

- Use **'<DF>[col_key_1, col_key_2][row_key]'** to get the fifth result's values.

Encode, Decode:

```
<DF> = pd.read_json/html('<str/path/url>')
<DF> = pd.read_csv/pickle/excel('<path/url>')
<DF> = pd.read_sql('<table_name/query>', <connection>)
<DF> = pd.read_clipboard()
```

```
<dict> = <DF>.to_dict(['d/l/s/sp/r/i'])
<str> = <DF>.to_json/html/csv/markdown/latex(['<path>'])
<DF>.to_pickle/excel(<path>)
<DF>.to_sql('<table_name>', <connection>)
```

GroupBy

Object that groups together rows of a dataframe based on the value of the passed column.

```
>>> df = DataFrame([[1, 2, 3], [4, 5, 6], [7, 8, 6]], index=list('abc'), columns=list('xyz'))
>>> df.groupby('z').get_group(3)
  x  y
a  1  2
>>> df.groupby('z').get_group(6)
  x  y
b  4  5
c  7  8
```

```
<GB> = <DF>.groupby(column_key/s) # DF is split into groups based on passed column.
<DF> = <GB>.get_group(group_key/s) # Selects a group by value of grouping column.
```

Aggregate, Transform, Map:

```
<DF> = <GB>.sum/max/mean/idxmax/all() # Or: <GB>.apply/agg(<agg_func>)
<DF> = <GB>.rank/diff/cumsum/ffill() # Or: <GB>.aggregate(<trans_func>)
<DF> = <GB>.fillna(<el>) # Or: <GB>.transform(<map_func>)
```

```
>>> gb = df.groupby('z')
      x  y  z
3: a   1  2  3
6: b   4  5  6
   c   7  8  6
```

	'sum'	'rank'	['rank']	{'x': 'rank'}
gb.agg(...)	<pre> x y z 1 2 3 11 13 6 11 13</pre>	<pre> x y a 1 1 b 1 1 c 2 2</pre>	<pre> x y rank rank a 1 1 b 1 1 c 2 2</pre>	<pre> x a 1 b 1 c 2</pre>
gb.trans(...)	<pre> x y a 1 2 b 11 13 c 11 13</pre>	<pre> x y a 1 1 b 1 1 c 1 1</pre>		

Rolling

Object for rolling window calculations.

```
<R_Sr/R_DF/R_GB> = <Sr/DF/GB>.rolling(window_size) # Also: `min_periods=None, center=False`.
<R_Sr/R_DF>      = <R_DF/R_GB>[column_key/s]      # Or: <R>.column_key
<Sr/DF/DF>      = <R_Sr/R_DF/R_GB>.sum/max/mean() # Or: <R>.apply/agg(<agg_func/str>)
```

Plotly


```
# $ pip3 install plotly kaleido
from plotly.express import line
<Figure> = line(<DF>, x=<col_name>, y=<col_name>) # Or: line(x=<list>, y=<list>)
<Figure>.update_layout(margin=dict(t=0, r=0, b=0, l=0)) # Or: paper_bgcolor='rgba(0, 0, 0, 0)'.
<Figure>.write_html/json/image('<path>') # Also: <Figure>.show()
```

Covid deaths by continent:



```
covid = pd.read_csv('https://covid.ourworldindata.org/data/owid-covid-data.csv',
                    usecols=['iso_code', 'date', 'total_deaths', 'population'])
continents = pd.read_csv('https://datahub.io/JohnSnowLabs/country-and-continent-codes-' + \
                          'list/r/country-and-continent-codes-list-csv.csv',
                          usecols=['Three_Letter_Country_Code', 'Continent_Name'])
df = pd.merge(covid, continents, left_on='iso_code', right_on='Three_Letter_Country_Code')
df = df.groupby(['Continent_Name', 'date']).sum().reset_index()
df['Total Deaths per Million'] = df.total_deaths * 1e6 / df.population
df = df[( '2020-03-14' < df.date) & (df.date < '2020-11-25')]
df = df.rename({'date': 'Date', 'Continent_Name': 'Continent'}, axis='columns')
line(df, x='Date', y='Total Deaths per Million', color='Continent').show()
```

Confirmed covid cases, Dow Jones, gold, and Bitcoin price:

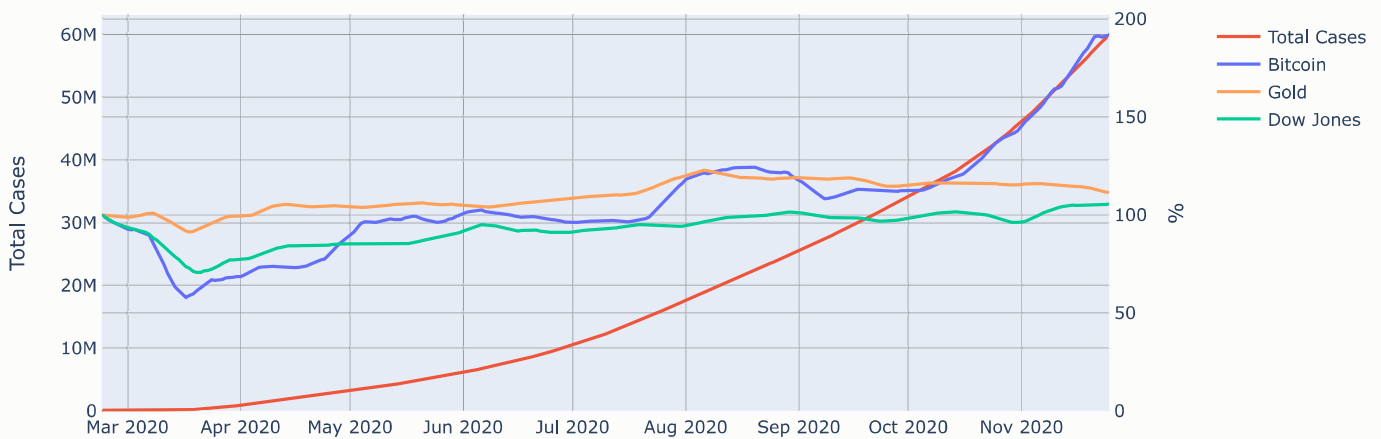

```
import pandas as pd
import plotly.graph_objects as go

def main():
    display_data(wrangle_data(*scrape_data()))

def scrape_data():
    def scrape_covid():
        url = 'https://covid.ourworldindata.org/data/owid-covid-data.csv'
        df = pd.read_csv(url, usecols=['location', 'date', 'total_cases'])
        return df[df.location == 'World'].set_index('date').total_cases

    def scrape_yahoo(slug):
        url = f'https://query1.finance.yahoo.com/v7/finance/download/{slug}' + \
            '?period1=1579651200&period2=1608850800&interval=1d&events=history'
        df = pd.read_csv(url, usecols=['Date', 'Close'])
        return df.set_index('Date').Close

    return scrape_covid(), scrape_yahoo('BTC-USD'), scrape_yahoo('GC=F'), scrape_yahoo('^DJI')

def wrangle_data(covid, bitcoin, gold, dow):
    df = pd.concat([bitcoin, gold, dow], axis=1)
    df = df.sort_index().interpolate()
    df = df.rolling(10, min_periods=1, center=True).mean()
    df = df.loc['2020-02-23':'2020-11-25']
    df = (df / df.iloc[0]) * 100
    return pd.concat([covid, df], axis=1, join='inner')

def display_data(df):
    df.columns = ['Total Cases', 'Bitcoin', 'Gold', 'Dow Jones']
    figure = go.Figure()
    for col_name in df:
        yaxis = 'y1' if col_name == 'Total Cases' else 'y2'
        trace = go.Scatter(x=df.index, y=df[col_name], name=col_name, yaxis=yaxis)
        figure.add_trace(trace)
    figure.update_layout(
        yaxis1=dict(title='Total Cases', rangemode='tozero'),
        yaxis2=dict(title='%', rangemode='tozero', overlaying='y', side='right'),
        legend=dict(x=1.1)
    ).show()

if __name__ == '__main__':
    main()
```

PySimpleGUI

```
# $ pip3 install PySimpleGUI
import PySimpleGUI as sg
layout = [[sg.Text("What's your name?")], [sg.Input()], [sg.Button('Ok')]]
window = sg.Window('Window Title', layout)
event, values = window.read()
print(f'Hello {values[0]}!' if event == 'Ok' else '')
```

Appendix

Cython

Library that compiles Python code into C.

```
# $ pip3 install cython
import pyximport; pyximport.install()
import <cython_script>
<cython_script>.main()
```

Definitions:

- All **'cdef'** definitions are optional, but they contribute to the speed-up.
- Script needs to be saved with a **'pyx'** extension.

```
cdef <type> <var_name> = <el>
cdef <type>[n_elements] <var_name> = [<el_1>, <el_2>, ...]
cdef <type/void> <func_name>(<type> <arg_name_1>, ...):
```

```
cdef class <class_name>:
    cdef public <type> <attr_name>
    def __init__(self, <type> <arg_name>):
        self.<attr_name> = <arg_name>
```

```
cdef enum <enum_name>: <member_name_1>, <member_name_2>, ...
```

PyInstaller

```
$ pip3 install pyinstaller
$ pyinstaller script.py # Compiles into './dist/script' directory.
$ pyinstaller script.py --onefile # Compiles into './dist/script' console app.
$ pyinstaller script.py --windowed # Compiles into './dist/script' windowed app.
$ pyinstaller script.py --add-data '<path>:.' # Adds file to the root of the executable.
```

- File paths need to be updated to **'os.path.join(sys._MEIPASS, <path>)'**.

Basic Script Template

```
#!/usr/bin/env python3
#
# Usage: .py
#

from sys import argv, exit
from collections import defaultdict, namedtuple
from dataclasses import make_dataclass
from enum import Enum
import functools as ft, itertools as it, operator as op, re

def main():
    pass

###
## UTIL
#

def read_file(filename):
    with open(filename, encoding='utf-8') as file:
        return file.readlines()

if __name__ == '__main__':
    main()
```

Index

A

abstract base classes, [4](#), [19](#)
animation, [40](#), [42-43](#)
argparse module, [22](#)
arguments, [10](#), [12](#), [22](#)
arrays, [29](#), [37-38](#)
asyncio module, [33](#)
audio, [40-41](#), [42](#)

B

beautifulsoup library, [35](#)
binary representation, [7](#), [8](#)
bitwise operators, [8](#)
bottle library, [36](#)
bytes, [22-23](#), [25](#), [28-29](#)

C

cache, [13](#)
callable, [17](#)
class, [4](#), [14-20](#), [31-32](#)
closure, [12-13](#)
collection, [4](#), [18](#), [19](#)
collections module, [2](#), [3](#), [4](#), [19](#), [29](#)
combinatorics, [8](#)
command line arguments, [22](#)
comparable, [16](#)
comprehensions, [11](#)
context manager, [17](#), [23](#), [27](#), [30](#)
copy function, [15](#)
coroutine, [33](#)
counter, [2](#), [4](#), [12](#), [17](#)
csv, [26](#), [34](#), [46](#), [47](#)
curses module, [33](#), [34](#)
cython, [49](#)

D

dataclasses module, [12](#), [15](#)
datetime module, [8-9](#)
decorator, [13](#), [14](#), [15](#), [16](#)
deques, [29](#)
dictionaries, [2](#), [4](#), [11](#), [19](#), [21](#)
duck types, [16-19](#)

E

enum module, [19-20](#)
enumerate function, [3](#)
eval function, [33](#)
exceptions, [20-21](#), [23](#), [35](#)

F

files, [22-29](#), [34](#), [46](#)
filter function, [11](#)
floats, [4](#), [6](#), [7](#)

format, [6-7](#), [37](#)
functools module, [11](#), [12](#), [13](#), [16](#)
futures, [30](#)

G

generators, [4](#), [11](#), [17](#)
global keyword, [12](#)
gui, [48](#)

H

hashable, [15](#), [16](#)
hexadecimal representation, [7](#), [8](#), [28](#)

I

image, [35](#), [39-40](#), [42-43](#)
inline, [11-12](#), [15](#), [20](#)
input function, [22](#)
introspection, [31](#)
ints, [4](#), [7](#), [8](#), [28](#)
is operator, [16](#)
iterable, [4](#), [18](#), [19](#)
iterator, [3-4](#), [11](#), [17](#)
itertools module, [3](#), [8](#)

J

json, [25](#), [36](#), [46](#)

L

lambda, [11](#)
list comprehension, [11](#)
lists, [1-2](#), [4](#), [11](#), [19](#), [21](#)
locks, [30](#), [33](#)
logging, [35](#)

M

main function, [1](#), [49](#)
map function, [11](#), [31](#)
math module, [7](#)
memoryviews, [29](#)
metaclass attribute, [32](#)
metaprogramming, [31-32](#)
mysql library, [27](#)

N

namedtuples, [3](#)
nonlocal keyword, [12](#)
numpy library, [37-38](#)

O

open function, [17](#), [22-23](#), [25](#), [26](#), [28](#)
operator module, [31](#)
os commands, [23-25](#), [34](#)

P

pandas library, [44-48](#)
partial function, [12](#), [20](#)
paths, [23-24](#), [34](#)
pickle module, [25](#)
pillow library, [39-40](#)
plotting, [34](#), [47-48](#)
print function, [22](#)
profiling, [36-37](#)
progress bar, [34](#)
property decorator, [15](#)
pygame library, [42-43](#)

Q

queues, [29](#), [30](#), [33](#)

R

random module, [8](#)
ranges, [3](#), [4](#)
recursion, [13](#)
reduce function, [11](#), [31](#)
regular expressions, [5-6](#)
requests library, [35](#), [36](#)

S

scraping, [35](#), [43](#), [46](#), [47-48](#)
sequence, [4](#), [18-19](#)
sets, [2](#), [4](#), [11](#), [19](#), [21](#), [31](#)
shell commands, [25](#)
sleep function, [34](#)
slots attribute, [15](#)
sortable, [1](#), [16](#)
splat operator, [10-11](#)
sql, [27](#), [46](#)
statistics, [7](#), [37-38](#), [44-48](#)
strings, [4-7](#), [14](#)
struct module, [28-29](#)
subprocess module, [25](#)
super function, [14](#)
synthesizer, [41](#)
sys module, [13](#), [21-22](#)

T

table, [26](#), [27](#), [34](#), [37-38](#), [45-46](#)
template, [6](#), [36](#)
threading module, [30](#)
time module, [34](#), [36](#)
tuples, [3](#), [4](#), [11](#)
type, [4](#), [31-32](#)

W

wave module, [40-41](#)
web, [36](#)

